


Technical information for structural dampers

Characteristic curves for emergency stop

26180-01205

Emergency stop insert, dynamic


E_{tot} : 3.05 Nm, E_{abs} : 2.19 Nm, efficiency: 72 %

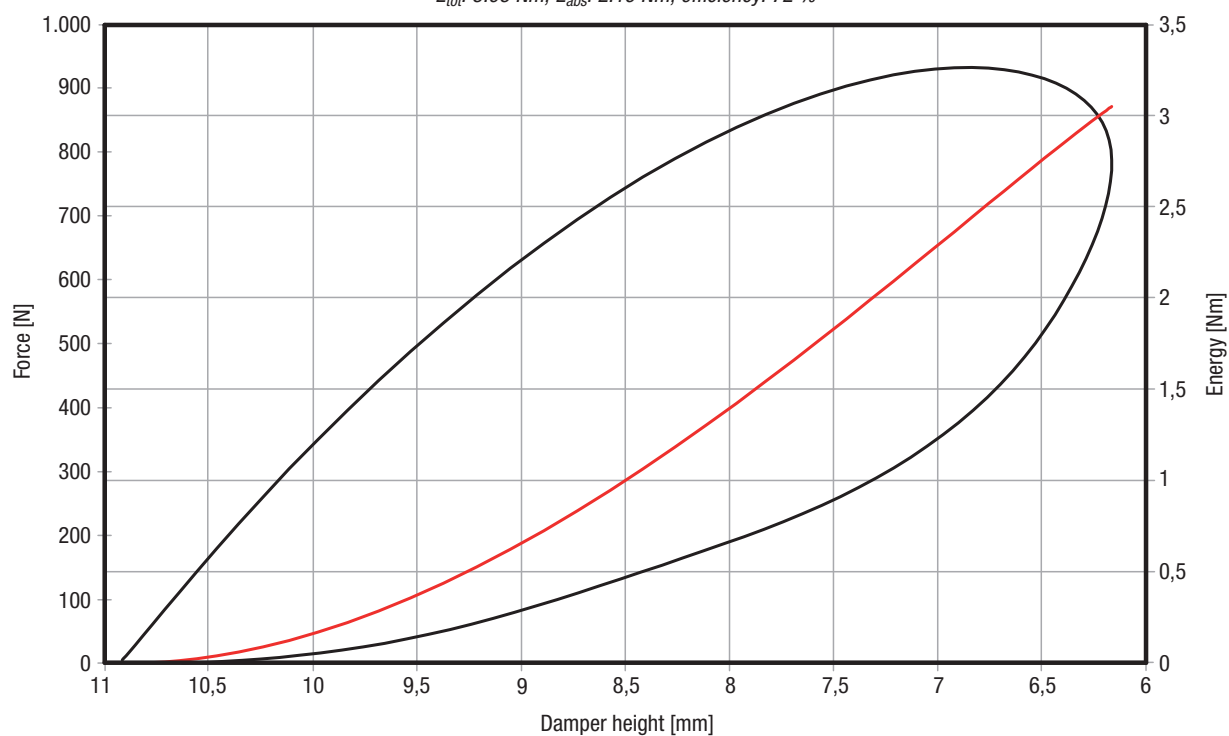

26180-01707


Emergency stop insert, dynamic

E_{tot} : 9.1 Nm, E_{abs} : 6.6 Nm, efficiency: 72 %

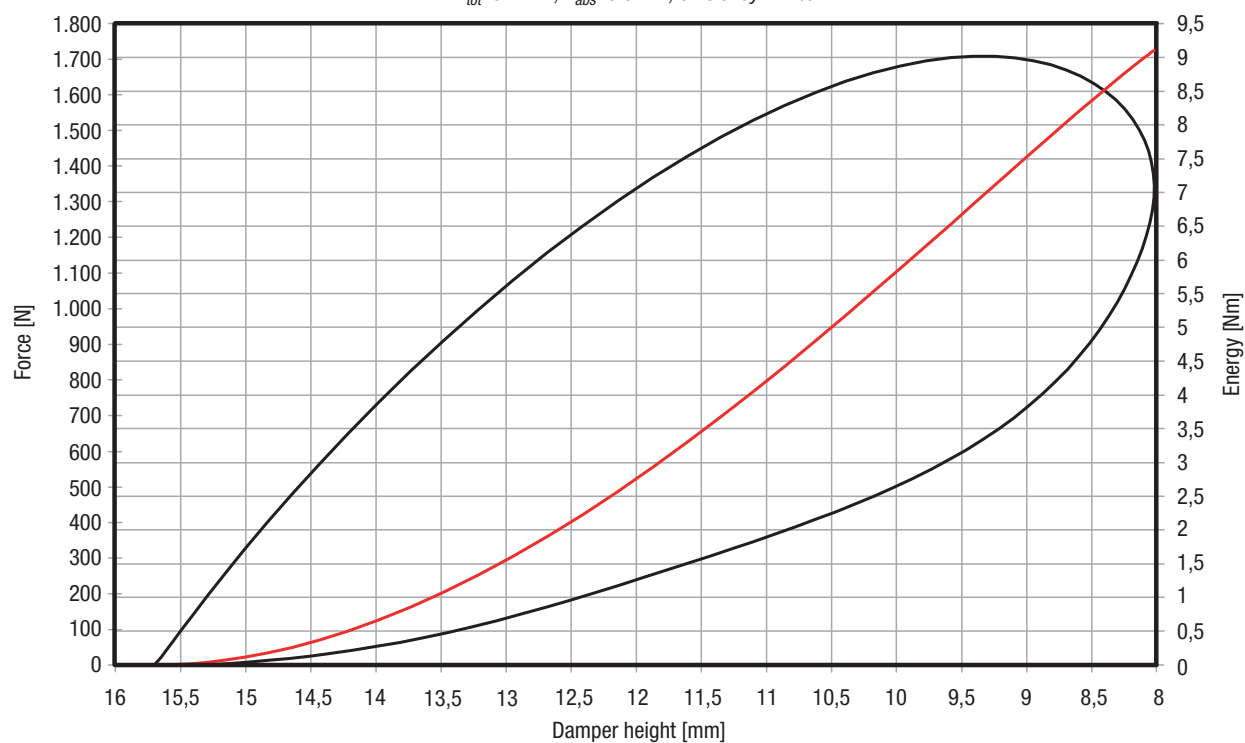


26180-02109

Emergency stop insert, dynamic
 E_{tot} : 15.8 Nm, E_{abs} : 10.9 Nm, efficiency: 69 %

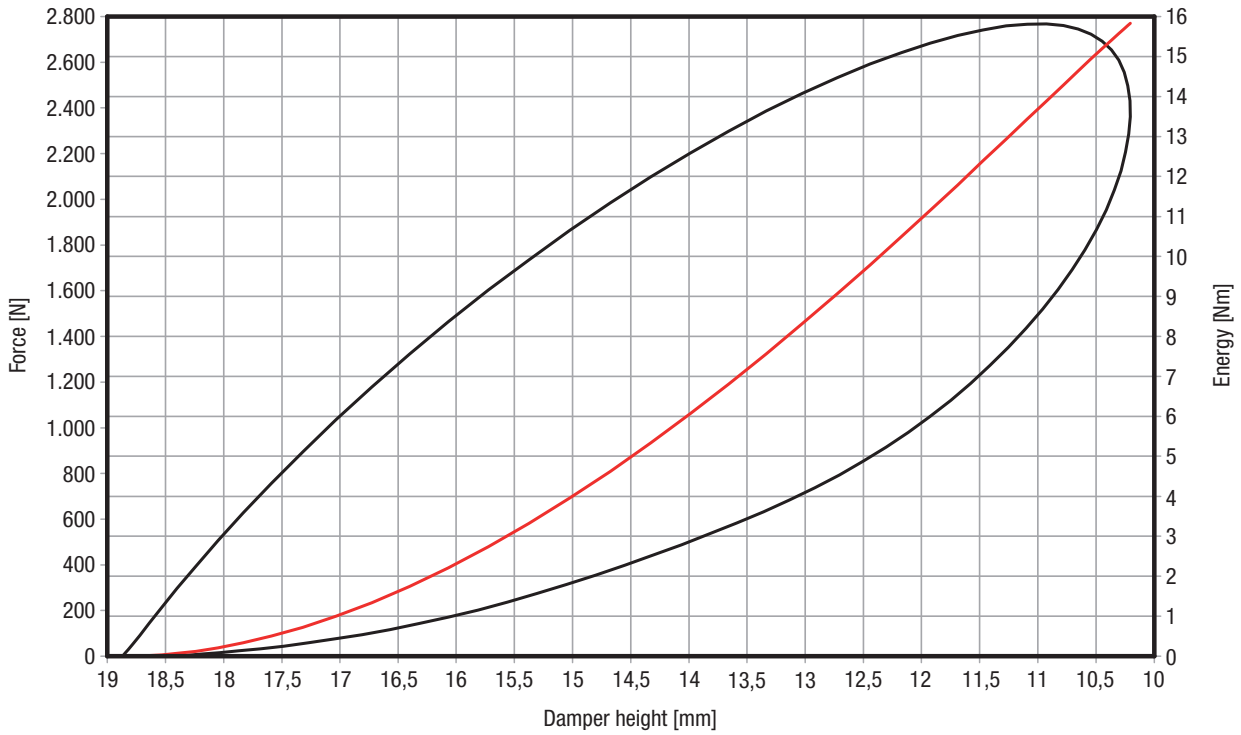


26180-02210

Emergency stop insert, dynamic
 E_{tot} : 26.6 Nm, E_{abs} : 14.5 Nm, efficiency: 70 %

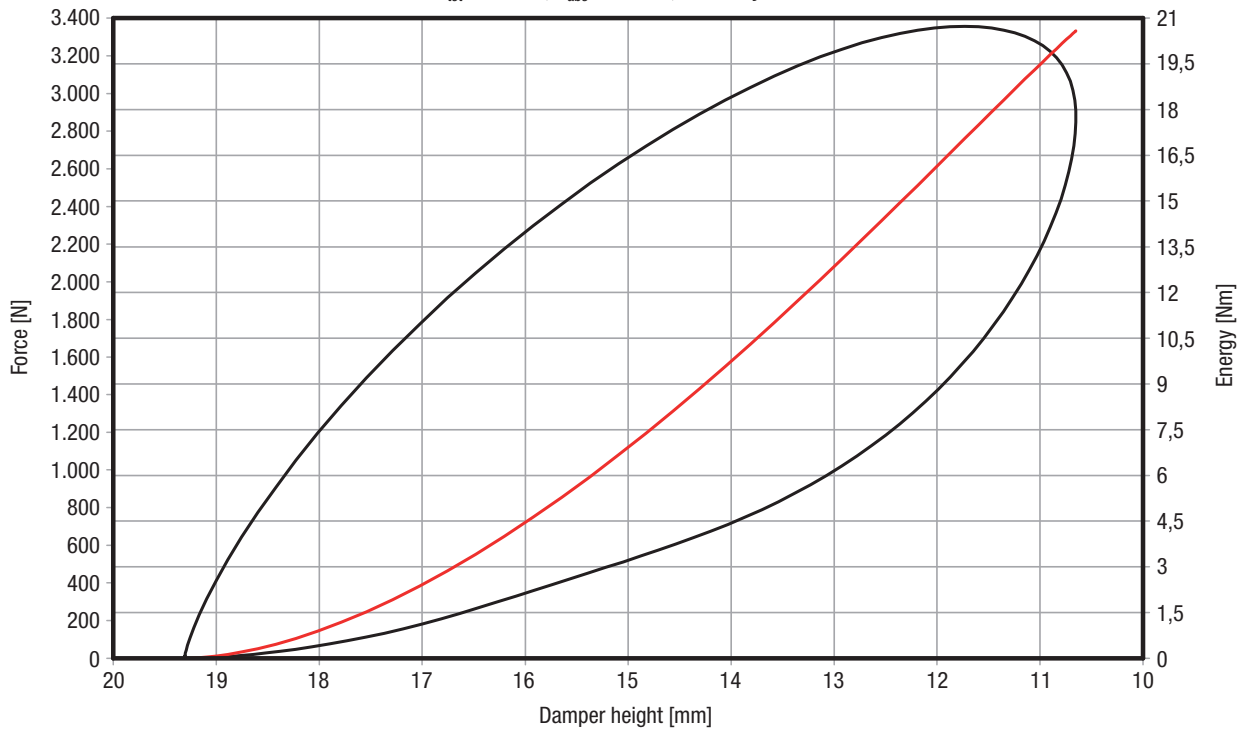


26180-02812

Emergency stop insert, dynamic
 E_{tot} : 46.4 Nm, E_{abs} : 33 Nm, efficiency: 71 %

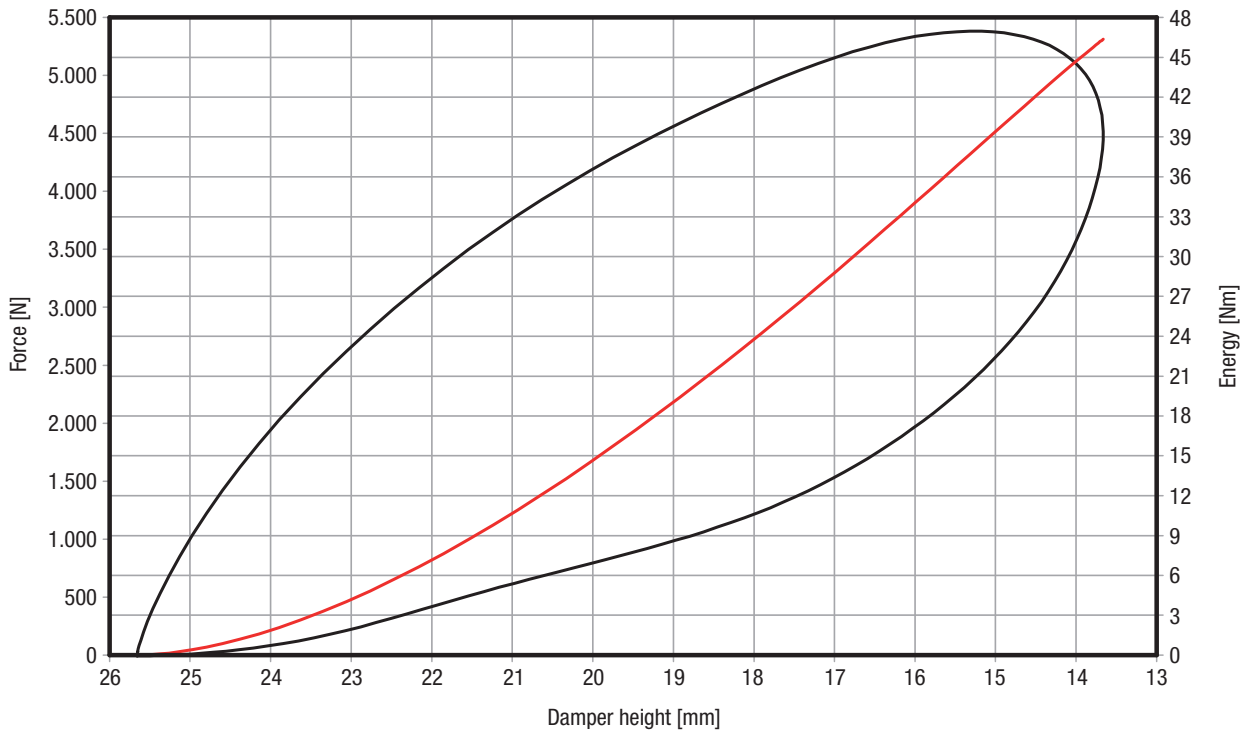


26180-03414

Emergency stop insert, dynamic
 E_{tot} : 86.5 Nm, E_{abs} : 62.5 Nm, efficiency: 72 %

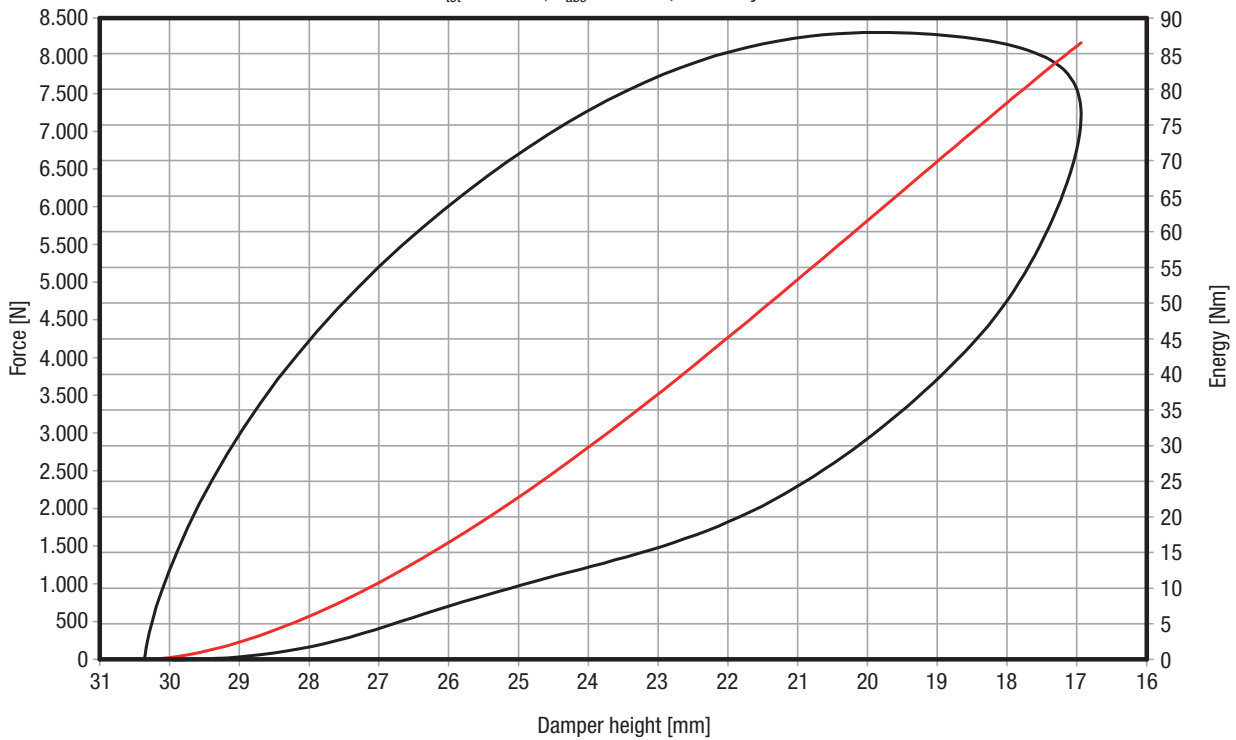


26180-03716

Emergency stop insert, dynamic
 E_{tot} : 112 Nm, E_{abs} : 80 Nm, efficiency: 72 %

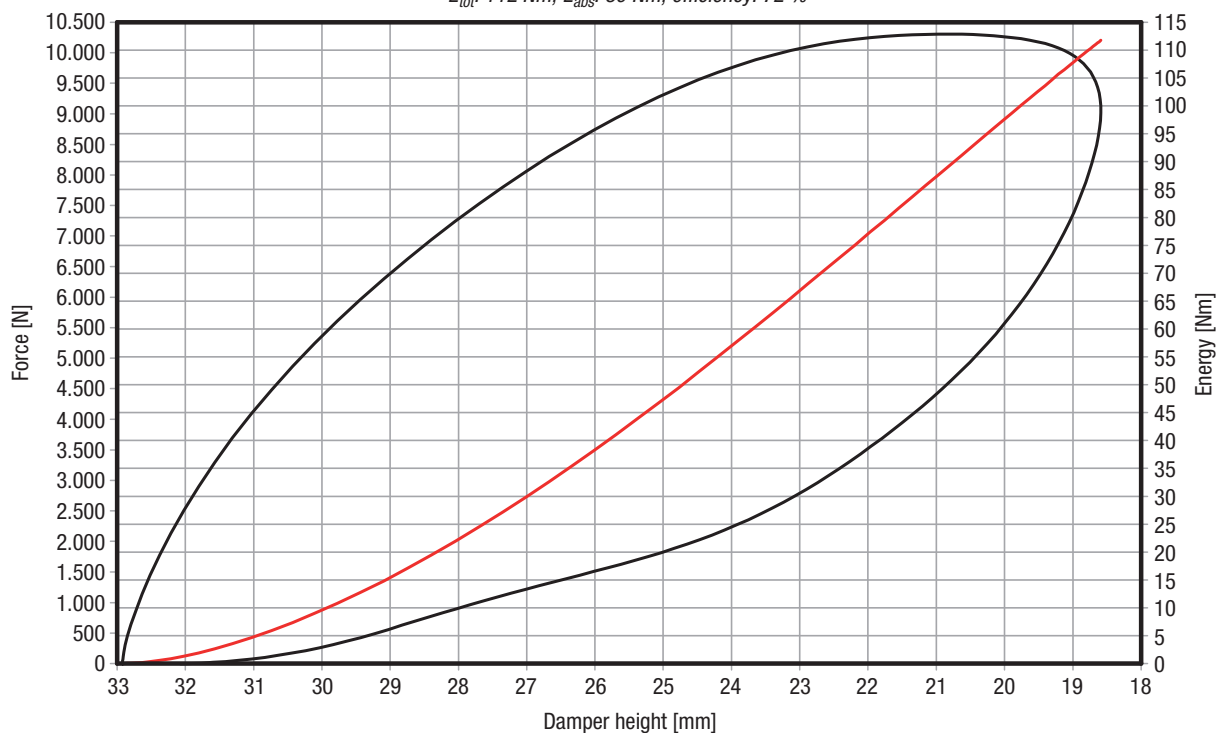

26180-04016


Emergency stop insert, dynamic
 E_{tot} : 130 Nm, E_{abs} : 95 Nm, efficiency: 73 %

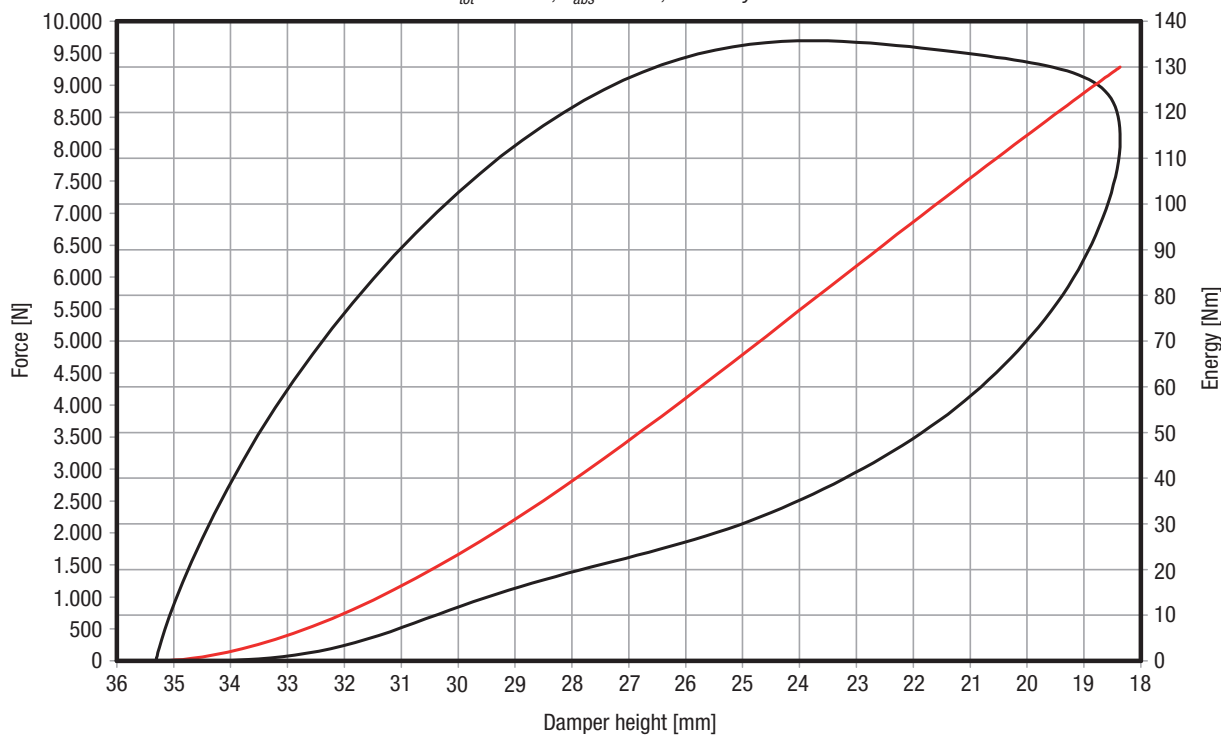

26180-04318

Emergency stop insert, dynamic


E_{tot} : 165 Nm, E_{abs} : 116 Nm, efficiency: 70 %

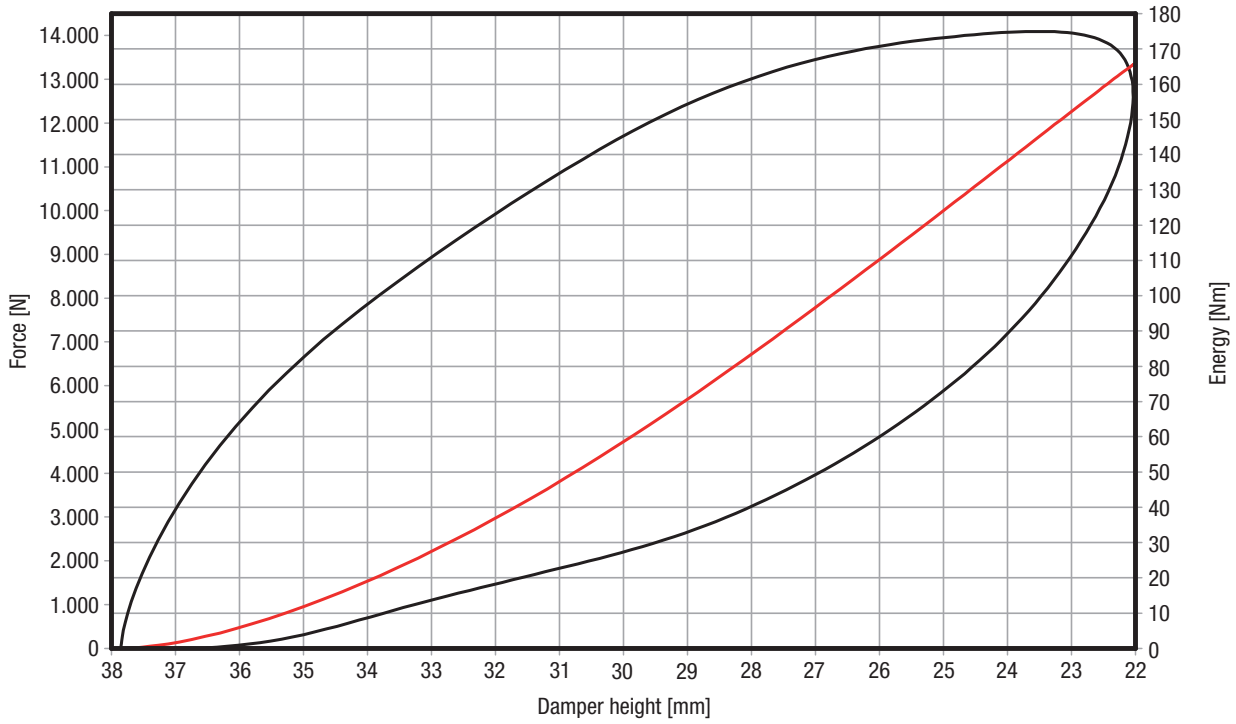

26180-04720

Emergency stop insert, dynamic


E_{tot} : 173 Nm, E_{abs} : 114 Nm, efficiency: 66 %

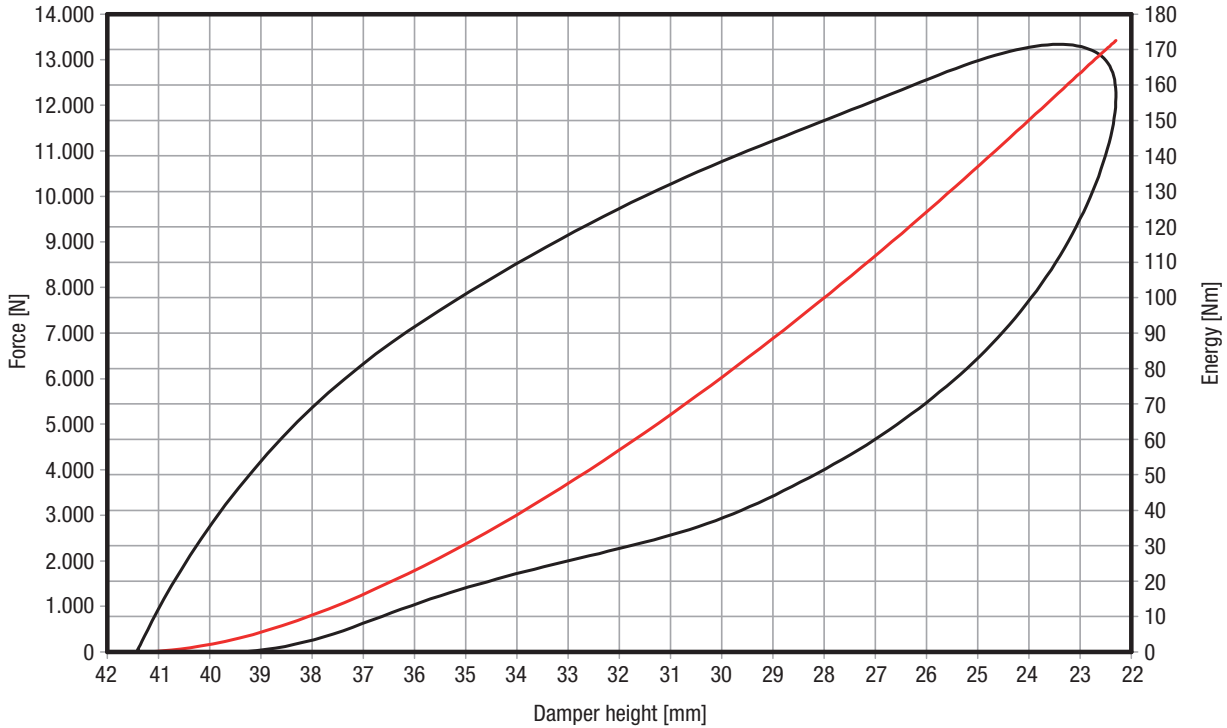

26180-05022

Emergency stop insert, dynamic


E_{tot} : 223 Nm, E_{abs} : 155 Nm, efficiency: 69 %

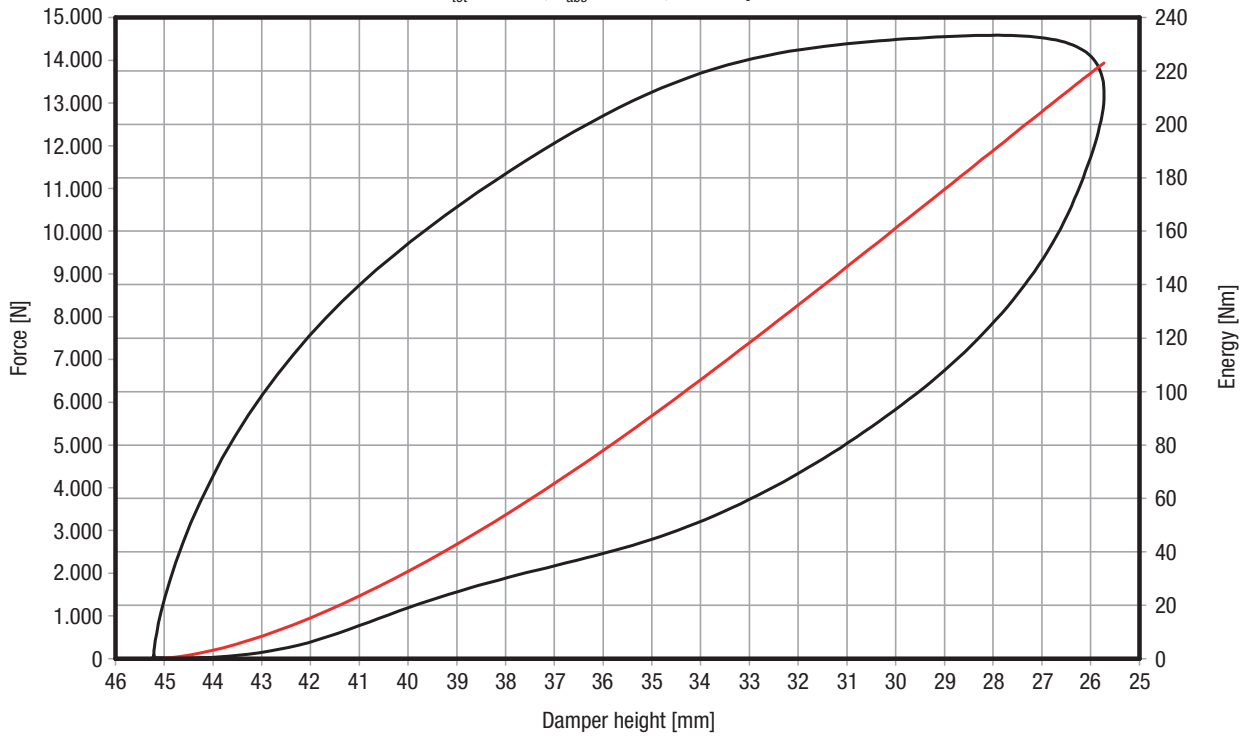

26180-05422

Emergency stop insert, dynamic


E_{tot} : 334 Nm, E_{abs} : 229 Nm, efficiency: 69 %

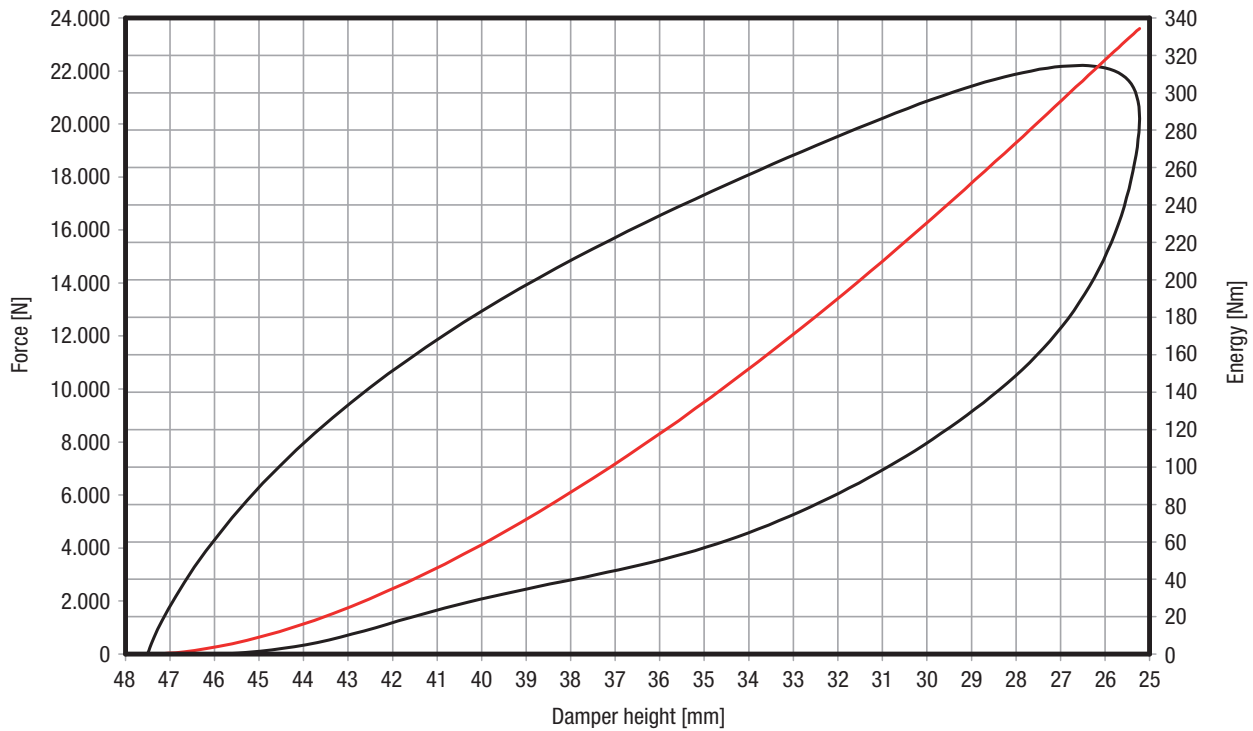

26180-05724

Emergency stop insert, dynamic


E_{tot} : 302 Nm, E_{abs} : 195 Nm, efficiency: 65 %

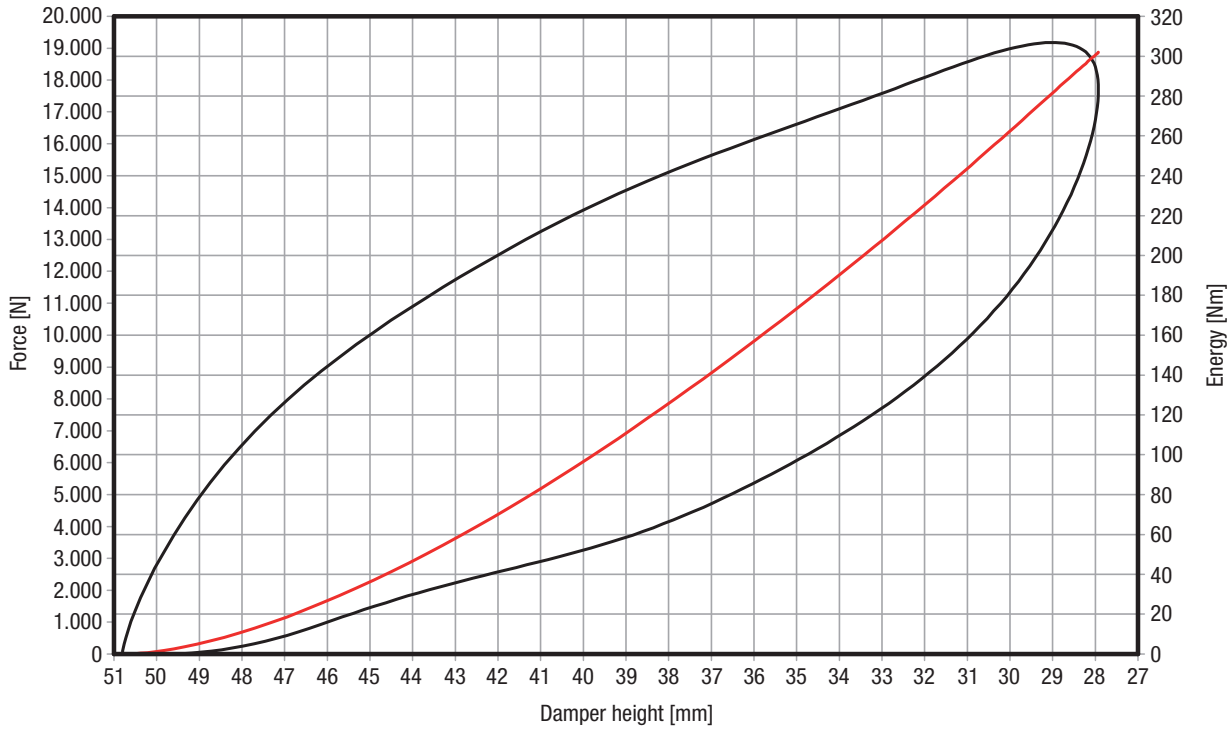

26180-06225

Emergency stop insert, dynamic


E_{tot} : 361 Nm, E_{abs} : 226 Nm, efficiency: 63 %

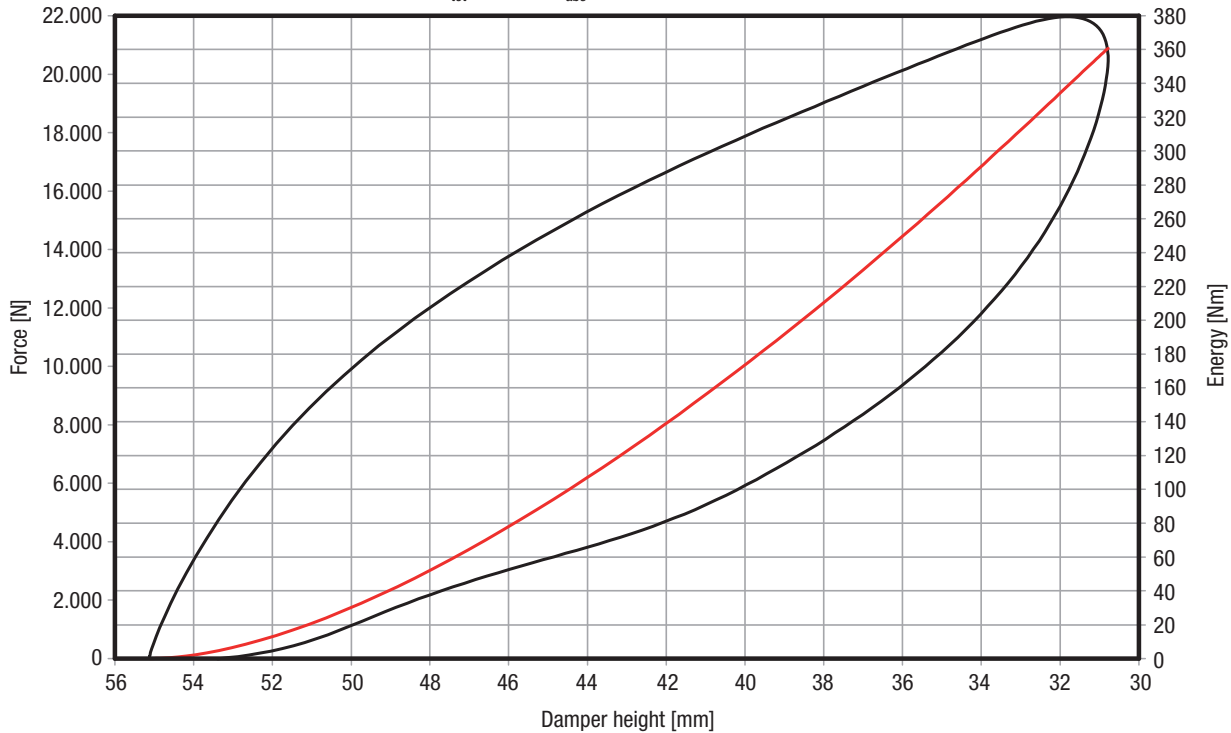

26180-06527

Emergency stop insert, dynamic


E_{tot} : 468 Nm, E_{abs} : 297 Nm, efficiency: 64 %

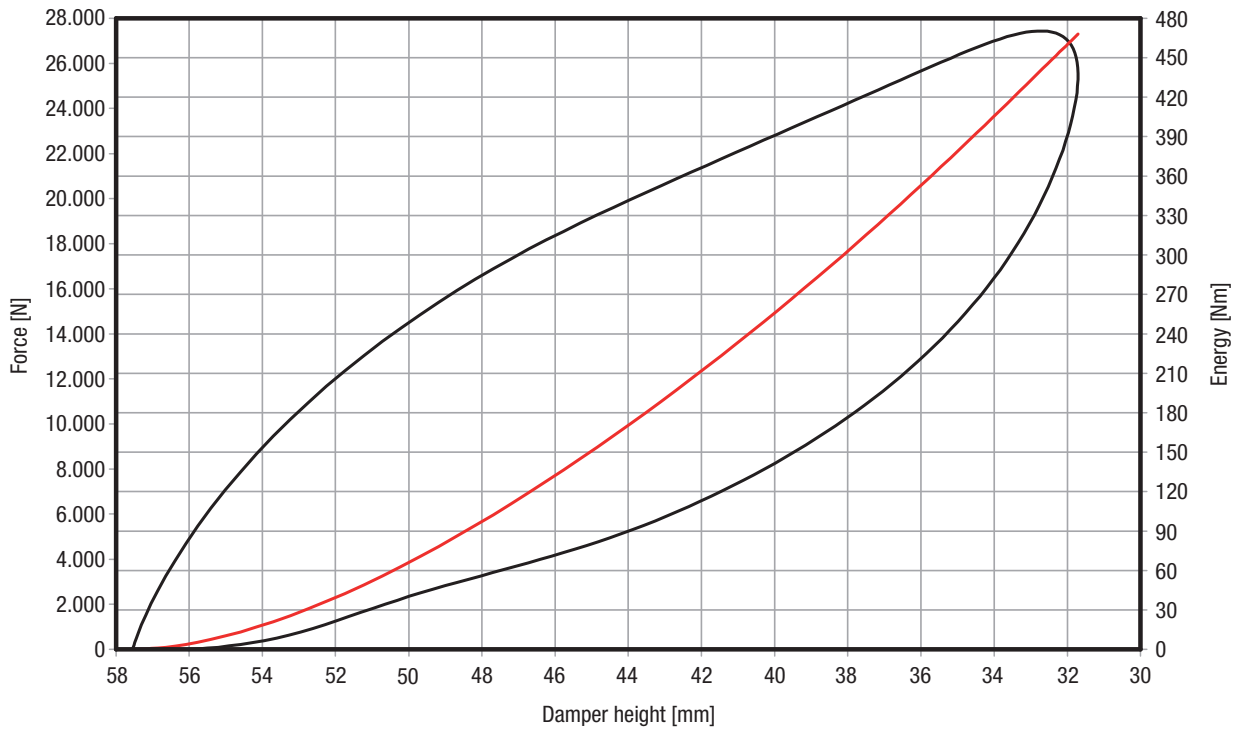

26180-07029


Emergency stop insert, dynamic

E_{tot} : 524 Nm, E_{abs} : 334 Nm, efficiency: 64 %

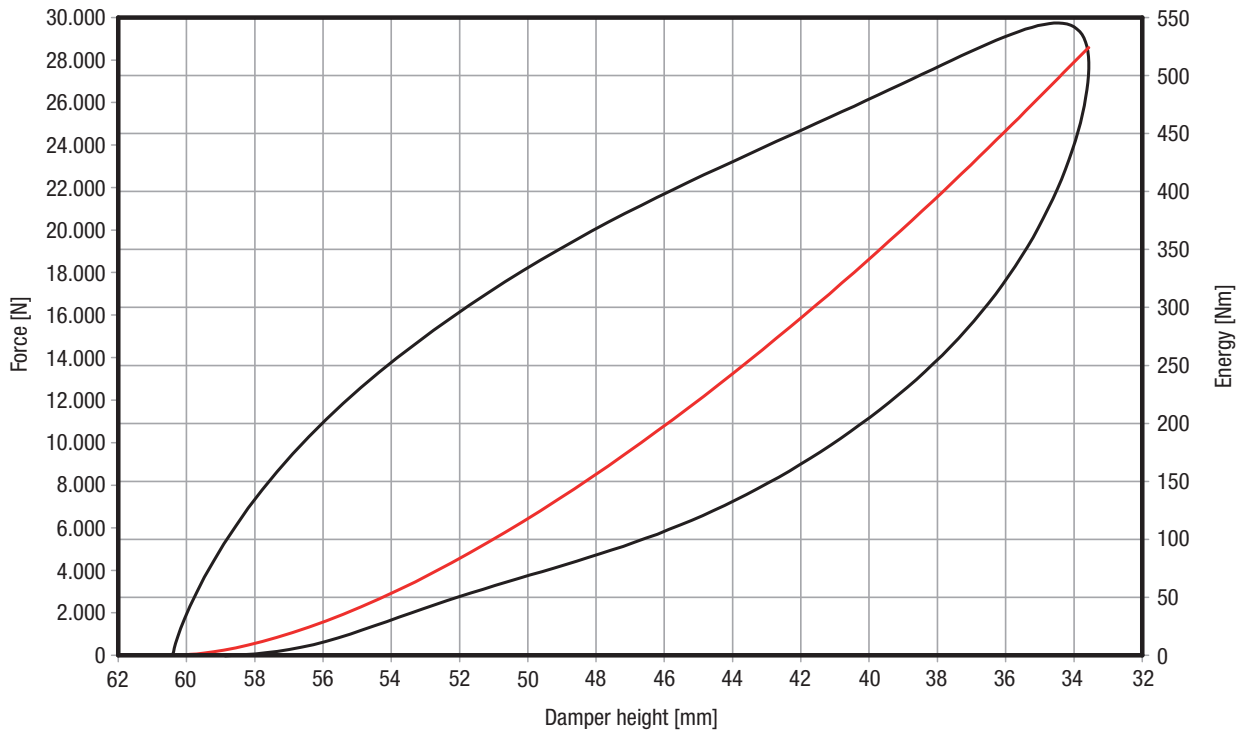

26180-07231

Emergency stop insert, dynamic
 E_{tot} : 559 Nm, E_{abs} : 379 Nm, efficiency: 67 %

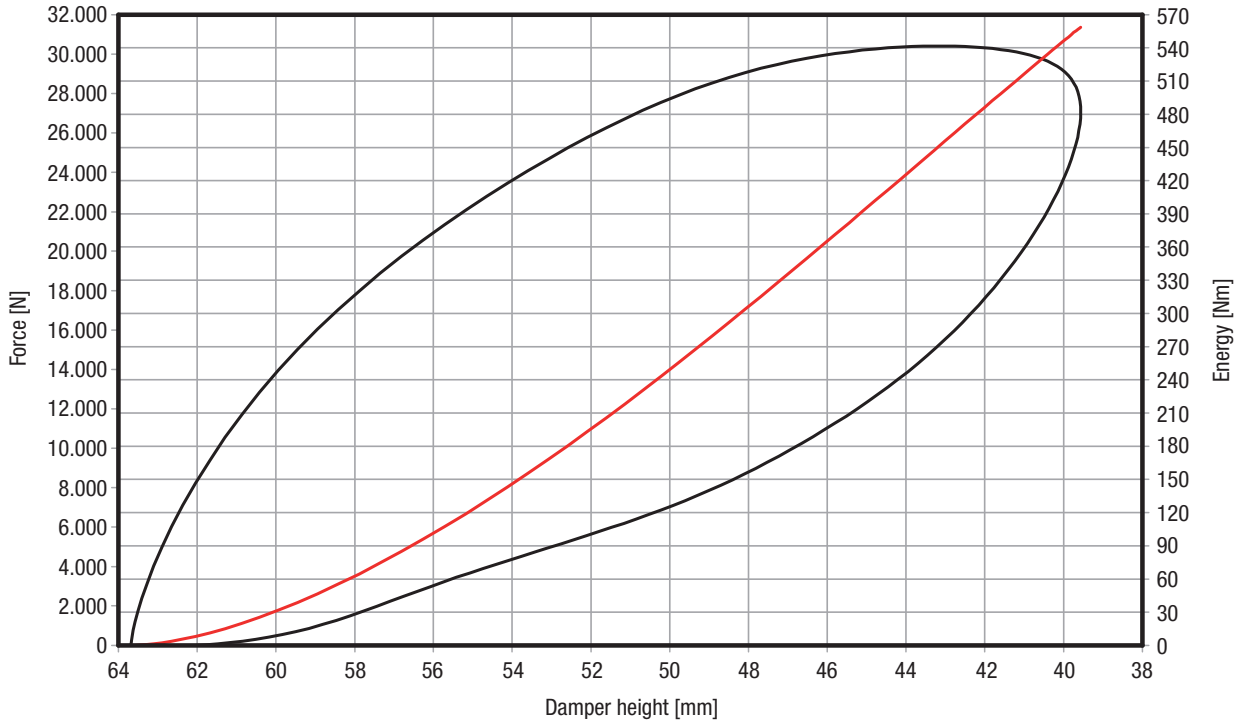

26180-08032

Emergency stop insert, dynamic
 E_{tot} : 831 Nm, E_{abs} : 550 Nm, efficiency: 66 %

