


# 型材阻尼件技术资料

## 急停的特征曲线

**26180-01205**

急停插件，动态


能量总计值: 3,05 Nm, 能量绝对值: 2,19 Nm, 效率: 72 %

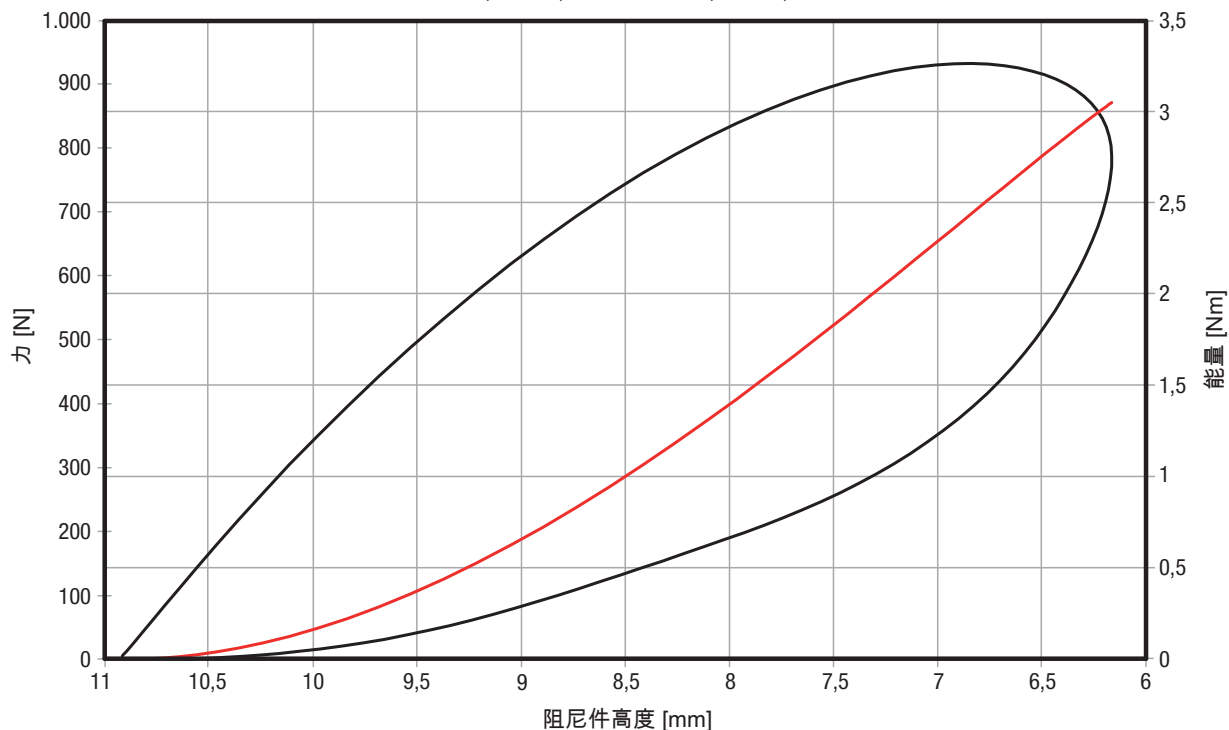

**26180-01707**

急停插件，动态


能量总计值: 9,1 Nm, 能量绝对值: 6,6 Nm, 效率: 72 %

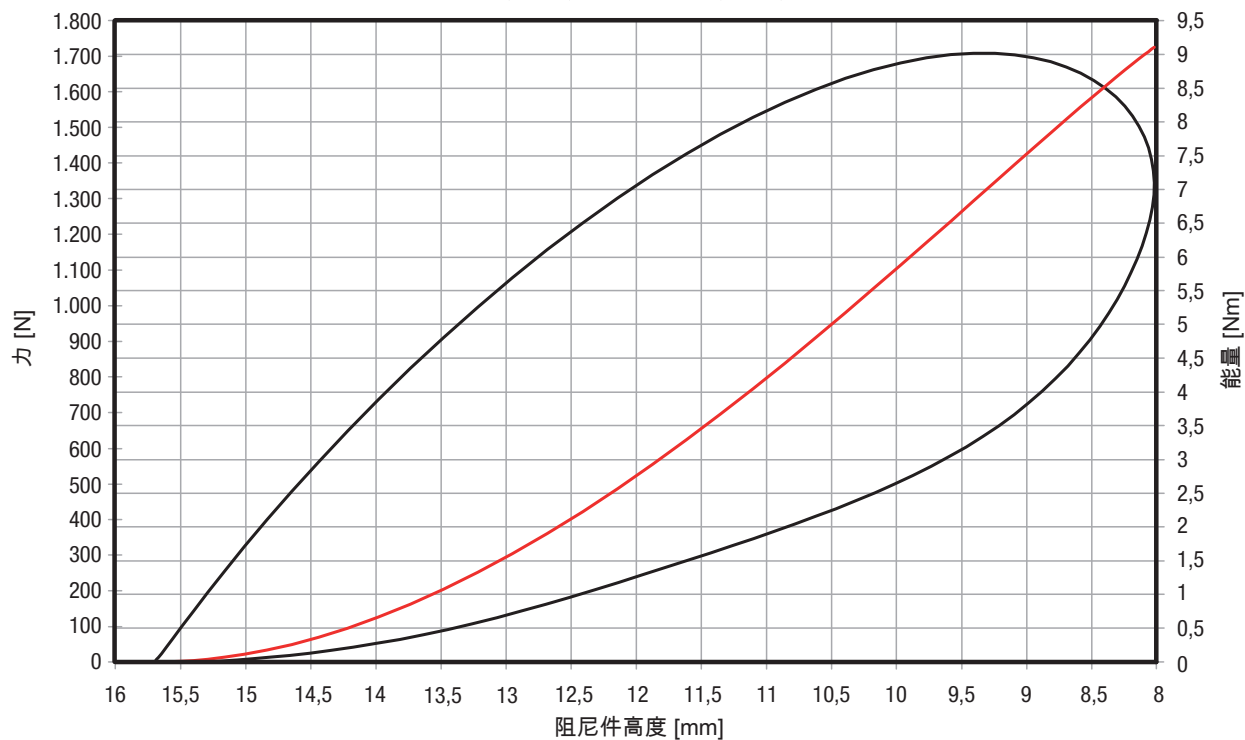

### 26180-02109

急停插件，动态


能量总计值: 15,8 Nm, 能量绝对值: 10,9 Nm, 效率: 69 %

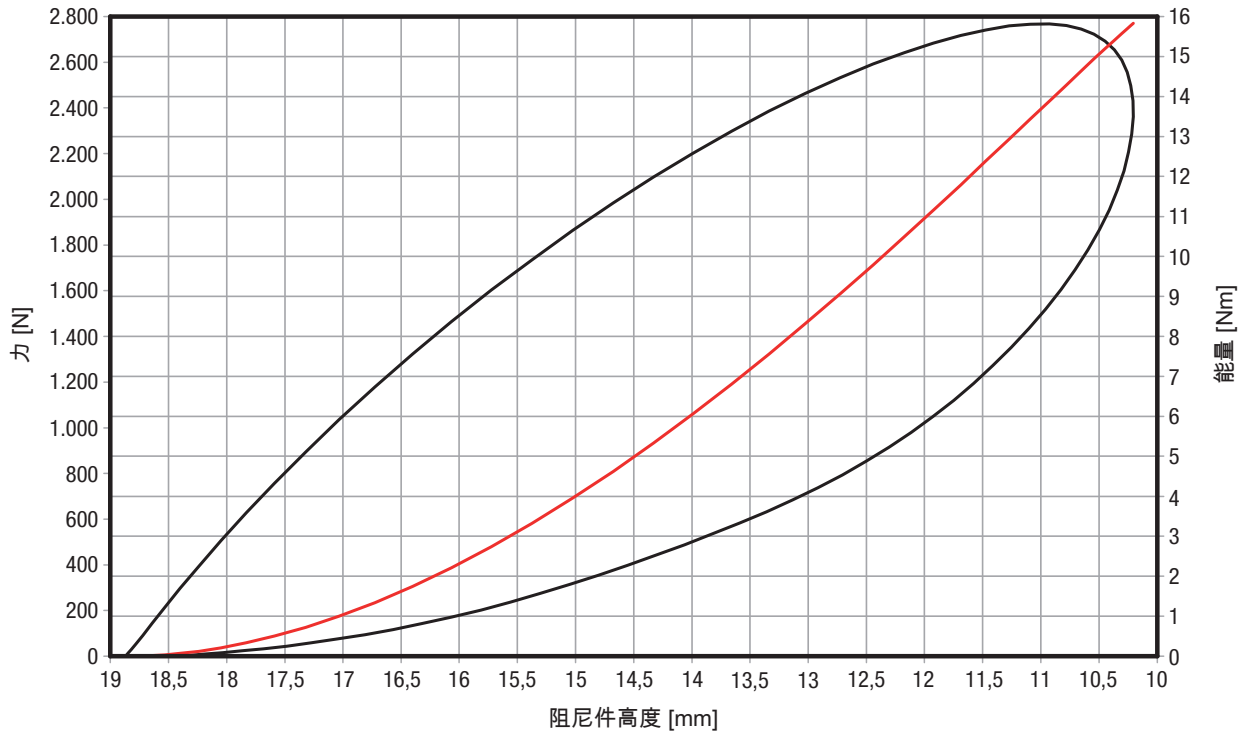

### 26180-02210

急停插件，动态


能量总计值: 20,6 Nm, 能量绝对值: 14,5 Nm, 效率: 70 %

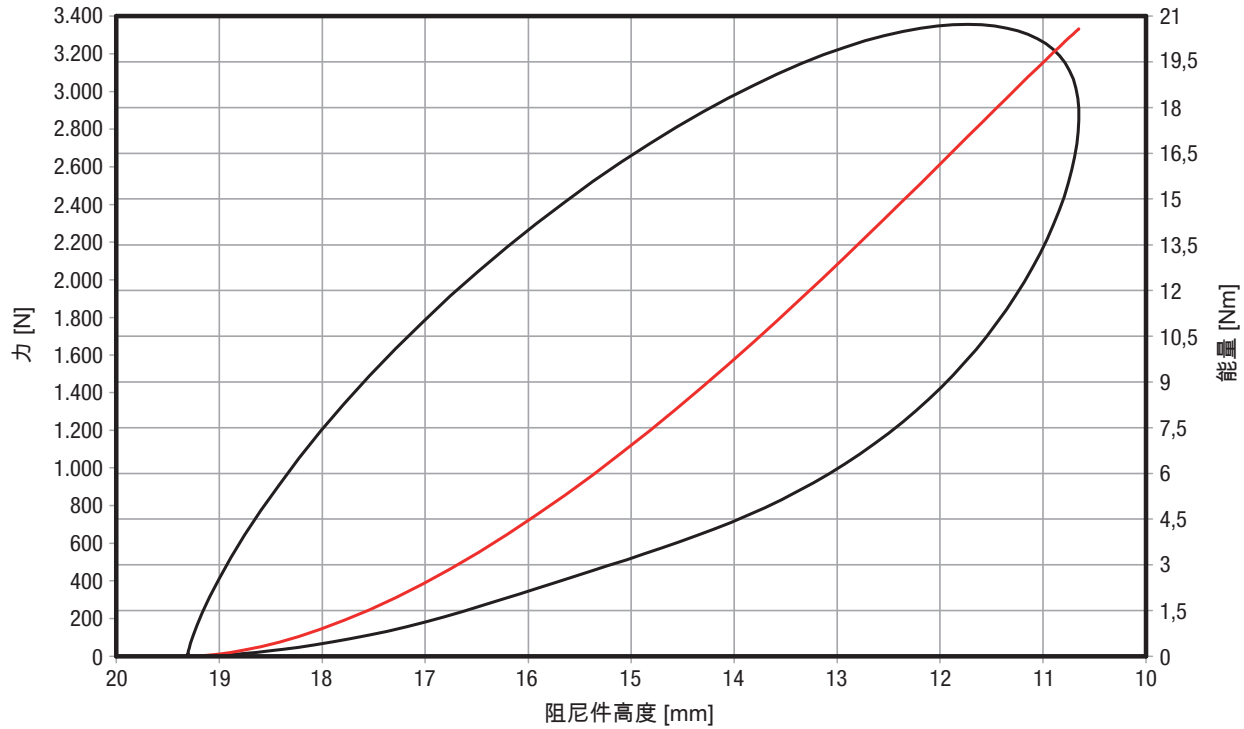

### 26180-02812

急停插件，动态


能量总计值: 46,4 Nm, 能量绝对值: 33 Nm, 效率: 71 %

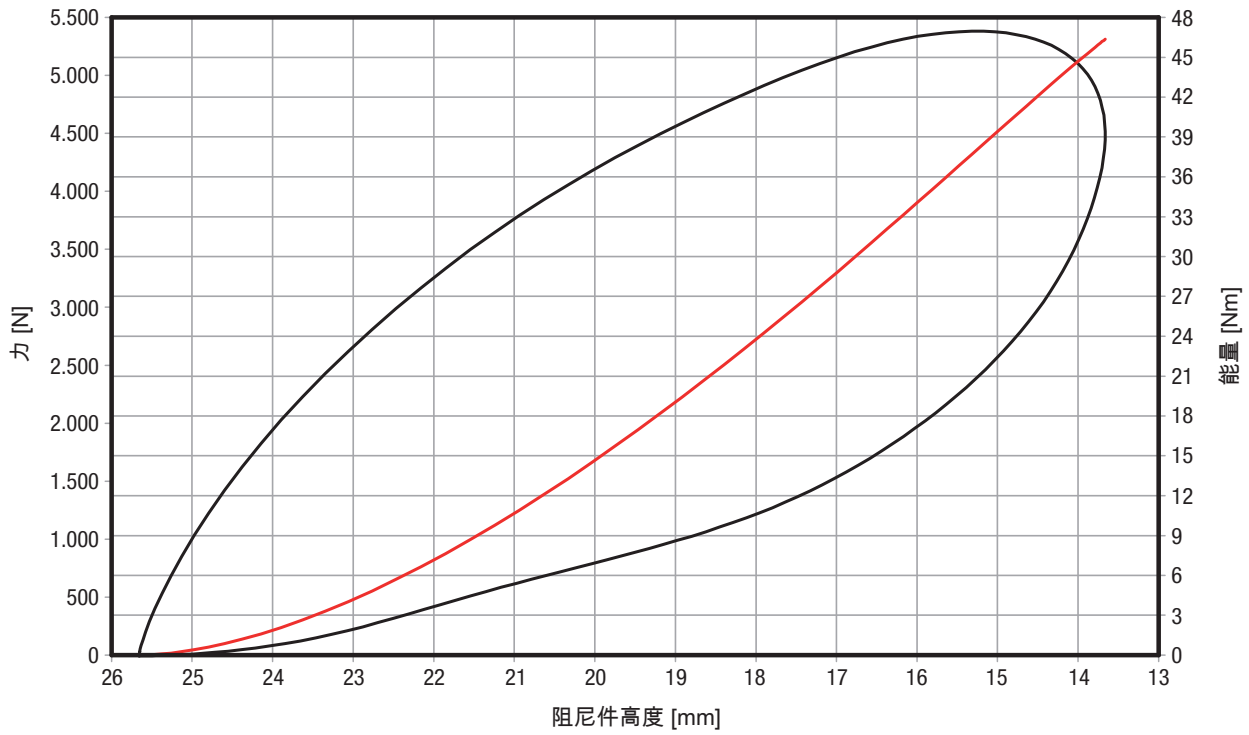

### 26180-03414

急停插件，动态


能量总计值: 86,5 Nm, 能量绝对值: 62,5 Nm, 效率: 72 %

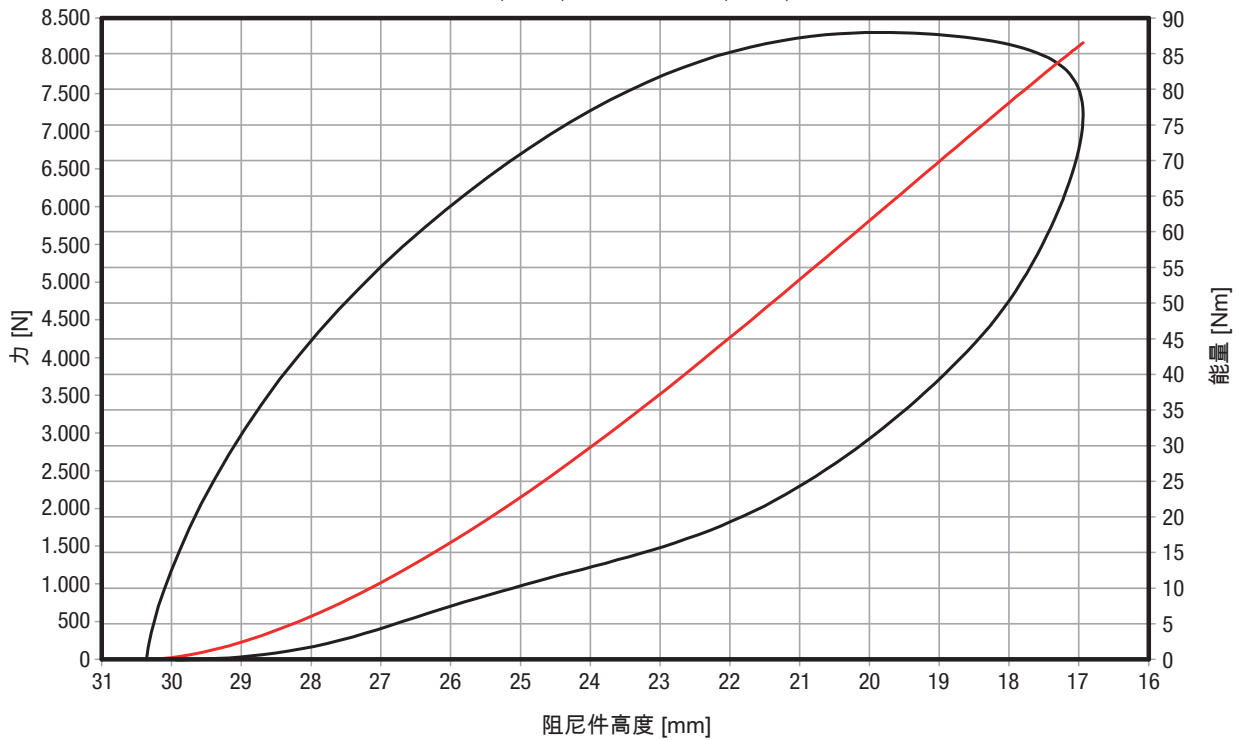

### 26180-03716

急停插件，动态


能量总计值: 112 Nm, 能量绝对值: 80 Nm, 效率: 72 %

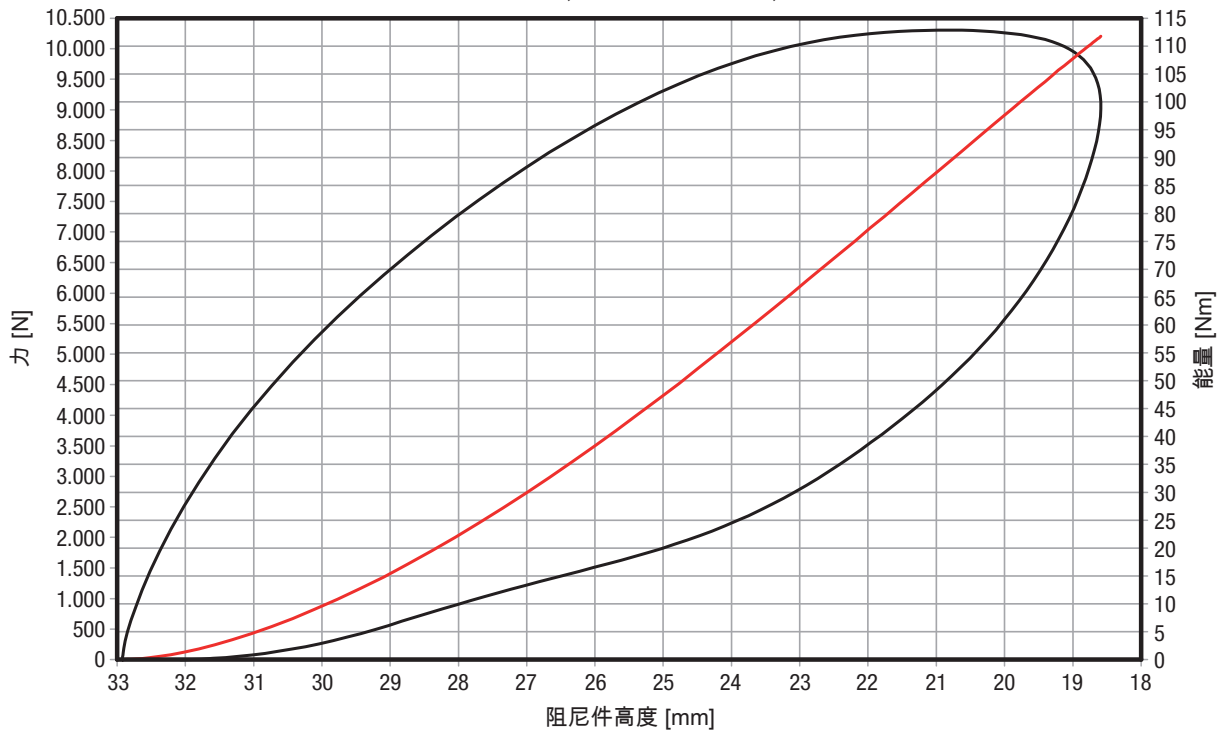

### 26180-04016

急停插件，动态


能量总计值: 130 Nm, 能量绝对值: 95 Nm, 效率: 73 %

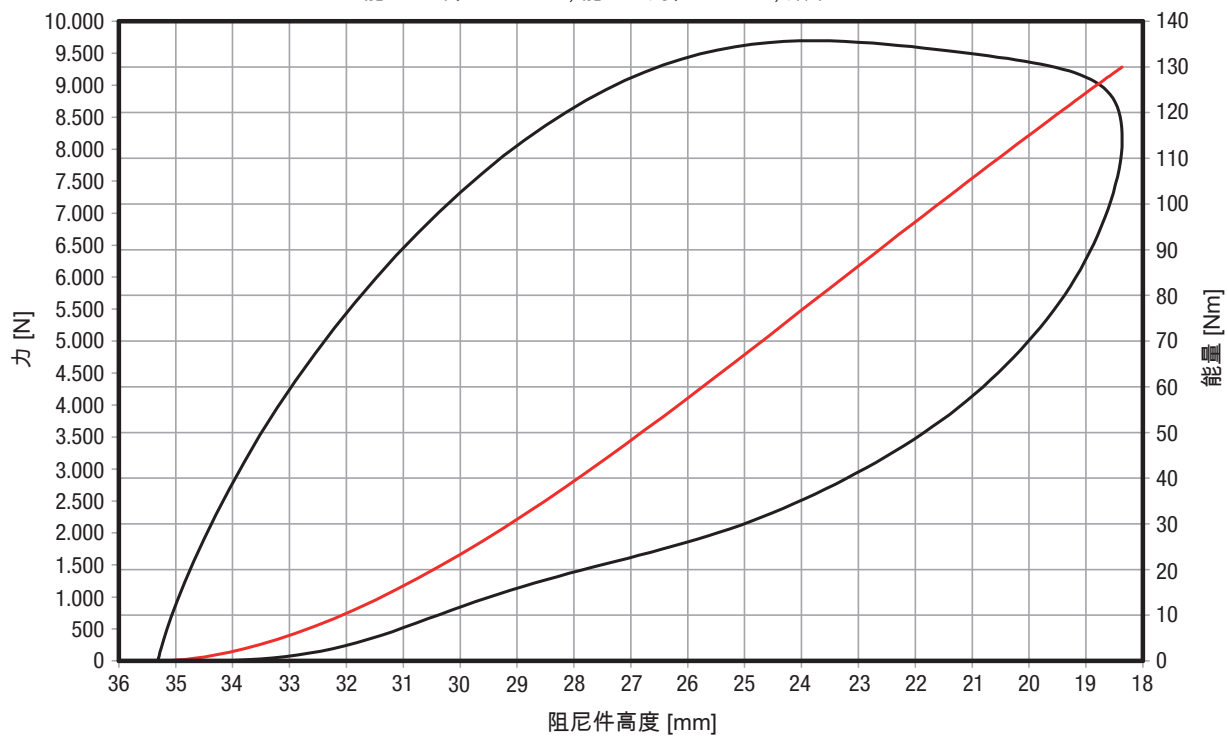

### 26180-04318

急停插件，动态


能量总计值: 165 Nm, 能量绝对值: 116 Nm, 效率: 70 %

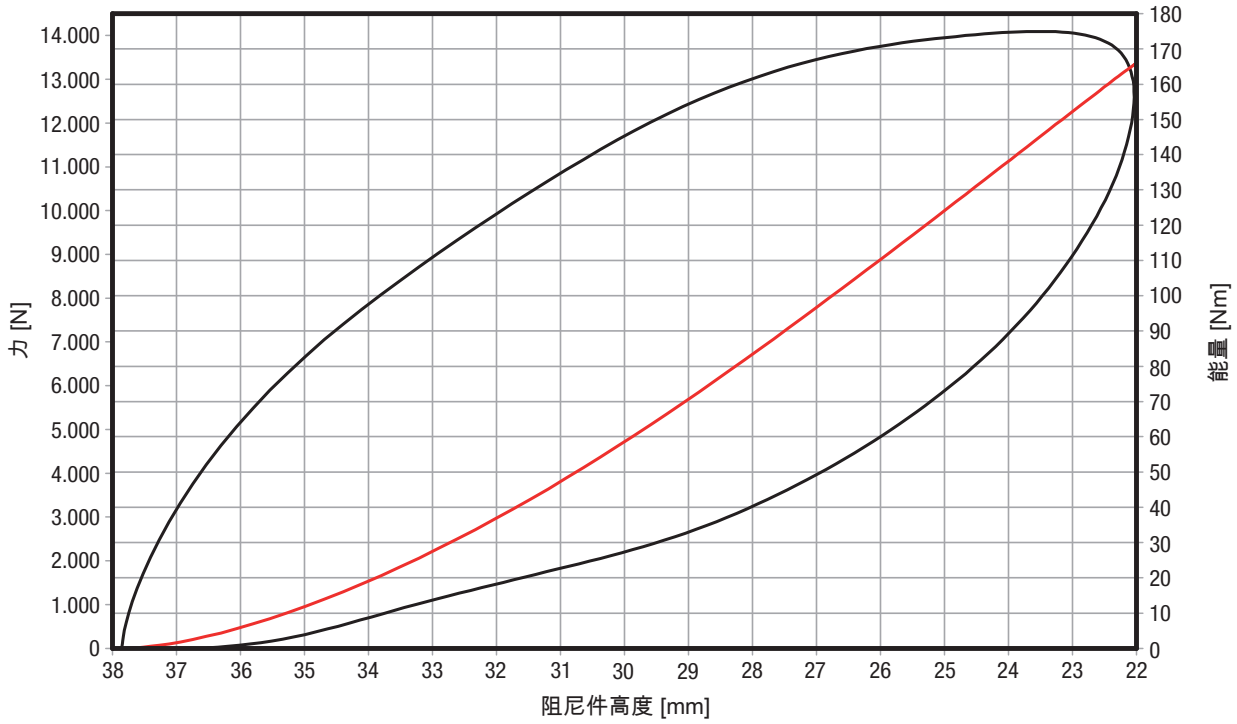

### 26180-04720

急停插件，动态


能量总计值: 173 Nm, 能量绝对值: 114 Nm, 效率: 66 %

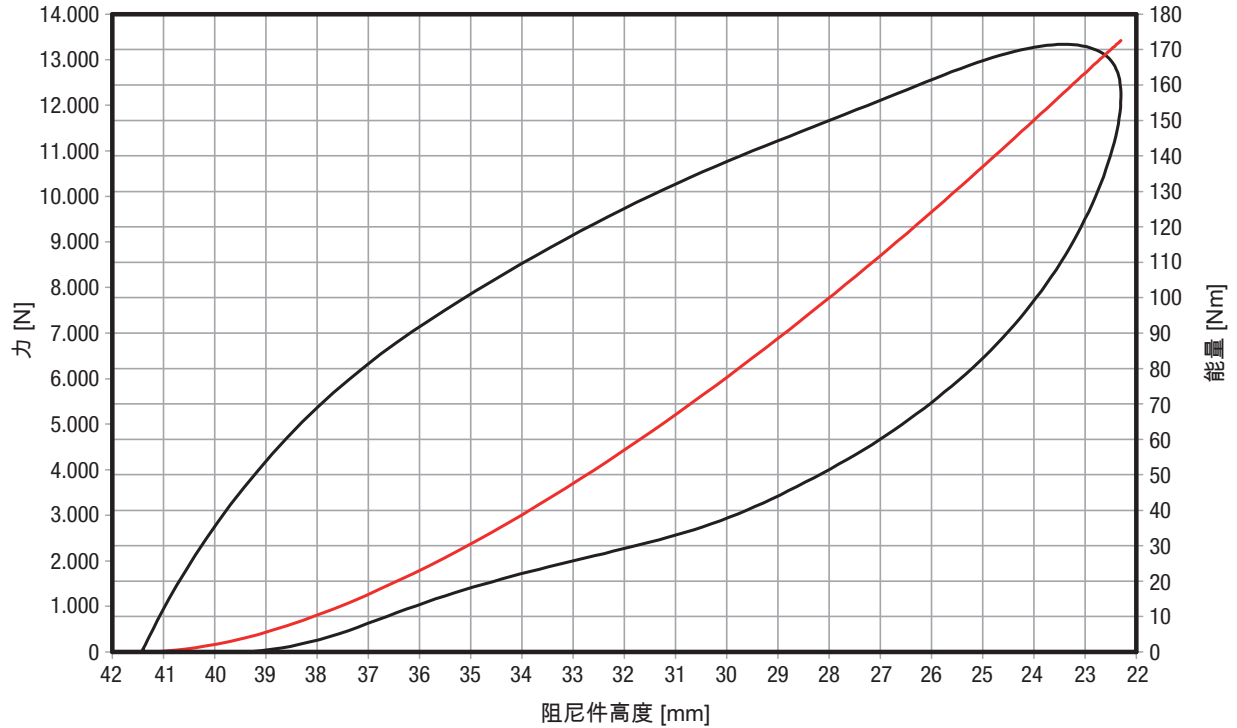

### 26180-05022

急停插件，动态


能量总计值: 223 Nm, 能量绝对值: 155 Nm, 效率: 69 %

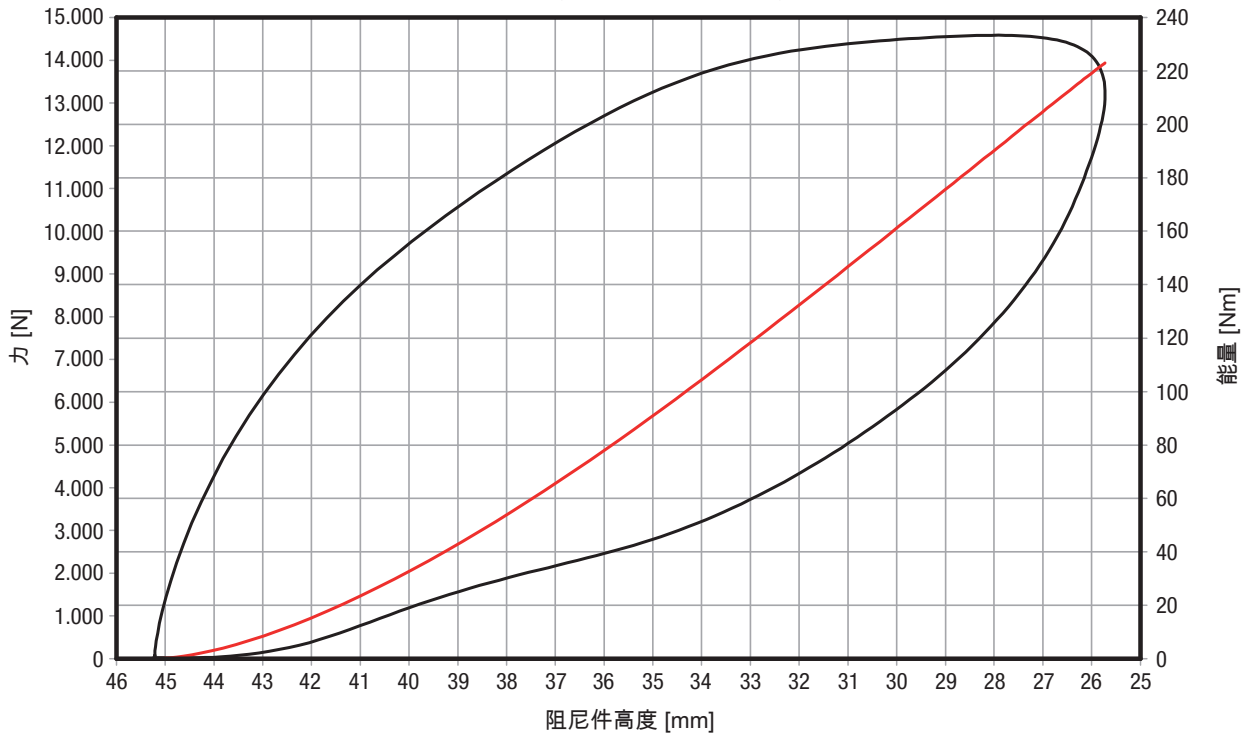

### 26180-05422

急停插件，动态


能量总计值: 334 Nm, 能量绝对值: 229 Nm, 效率: 69 %

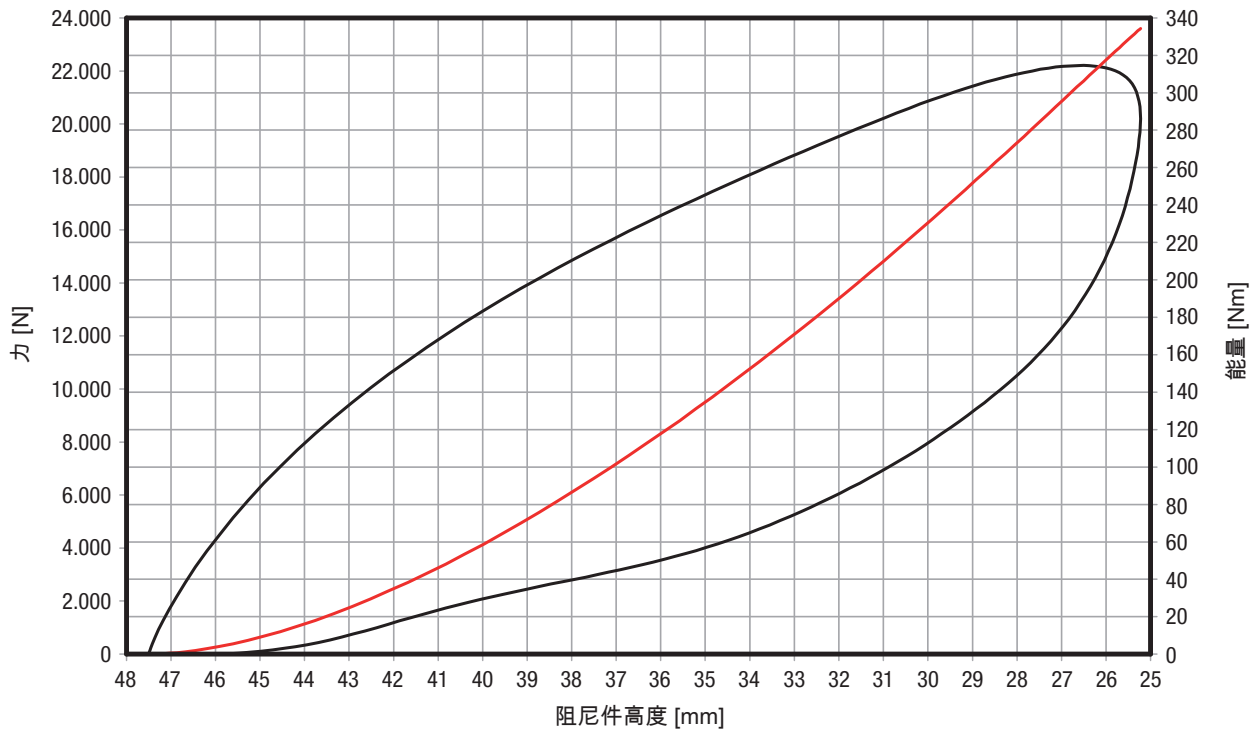

### 26180-05724

急停插件，动态


能量总计值: 302 Nm, 能量绝对值: 195 Nm, 效率: 65 %

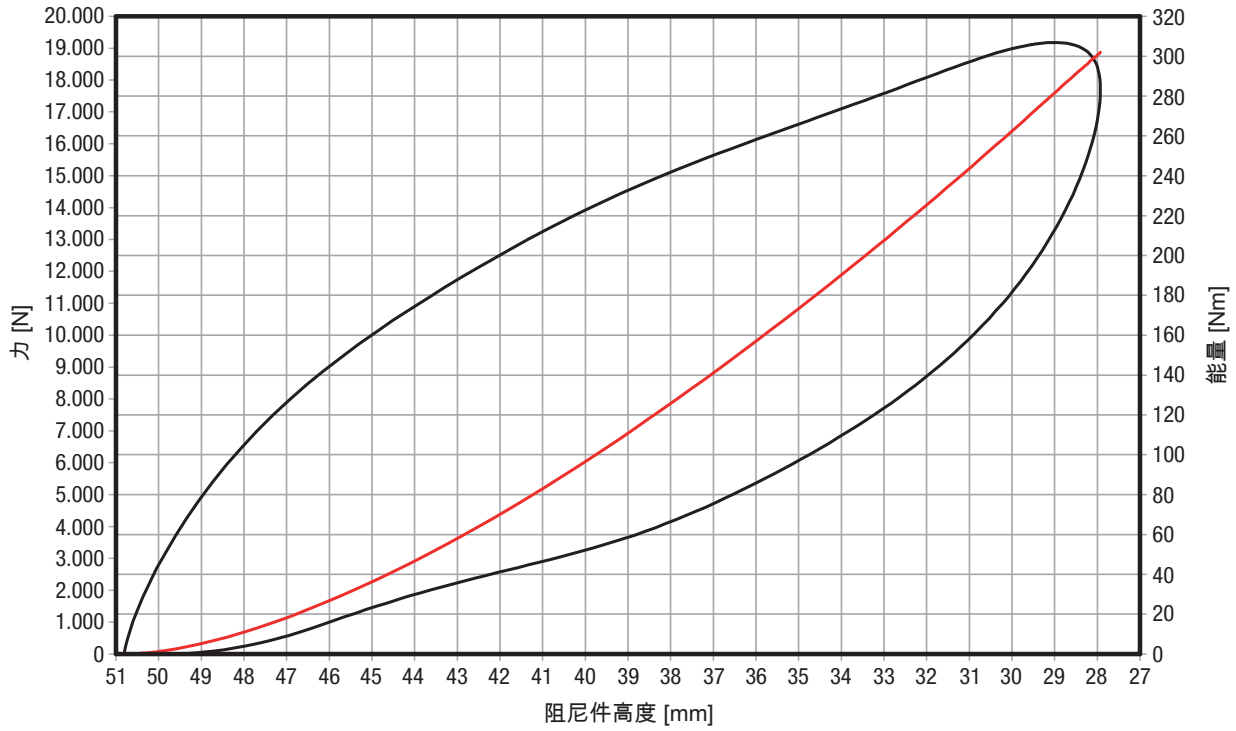

### 26180-06225

急停插件，动态


能量总计值: 361 Nm, 能量绝对值: 226 Nm, 效率: 63 %

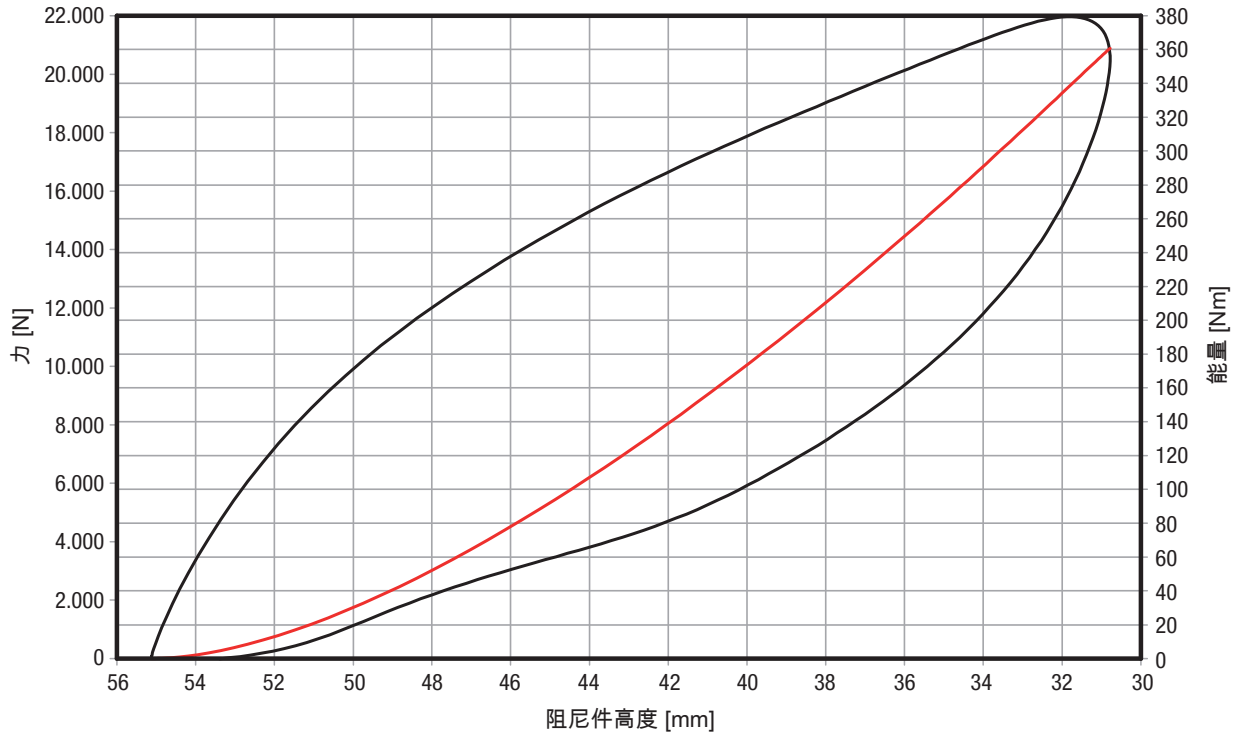

### 26180-06527

急停插件，动态


能量总计值: 468 Nm, 能量绝对值: 297 Nm, 效率: 64 %

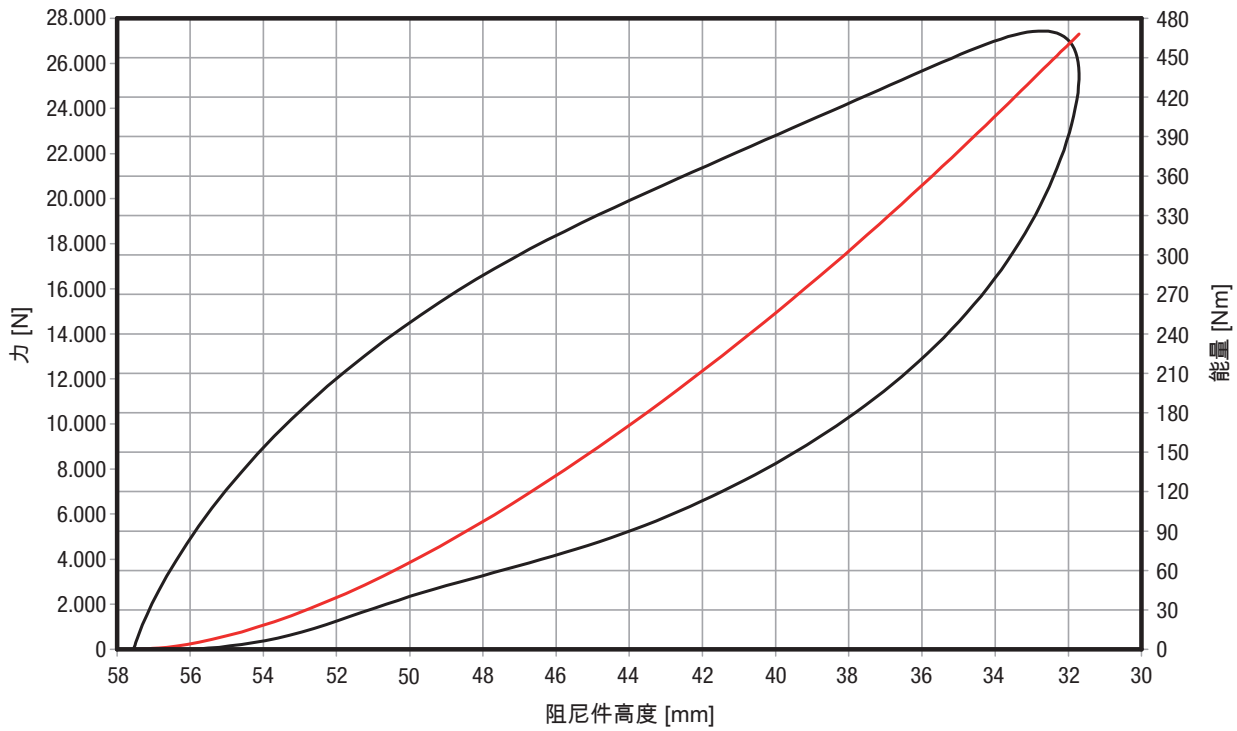

### 26180-07029

急停插件，动态

能量总计值: 524 Nm, 能量绝对值: 334 Nm, 效率: 64 %

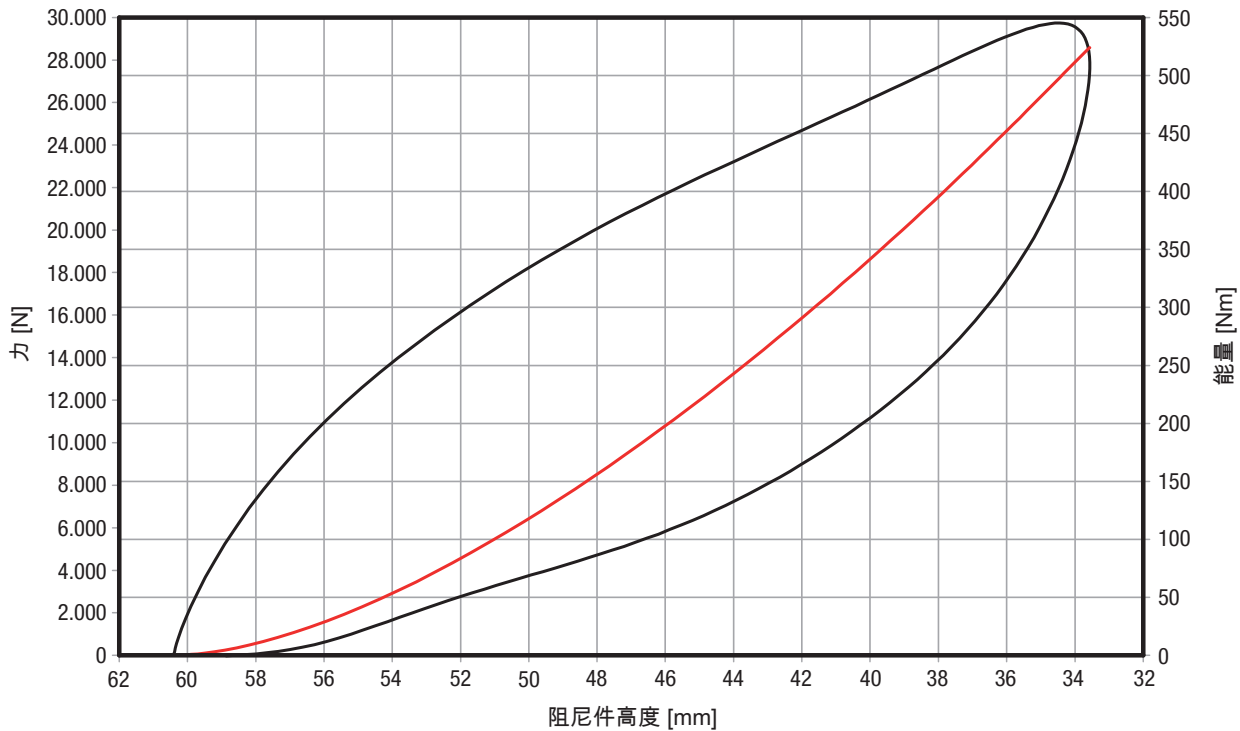




### 26180-07231

急停插件，动态

能量总计值: 559 Nm, 能量绝对值: 379 Nm, 效率: 67 %

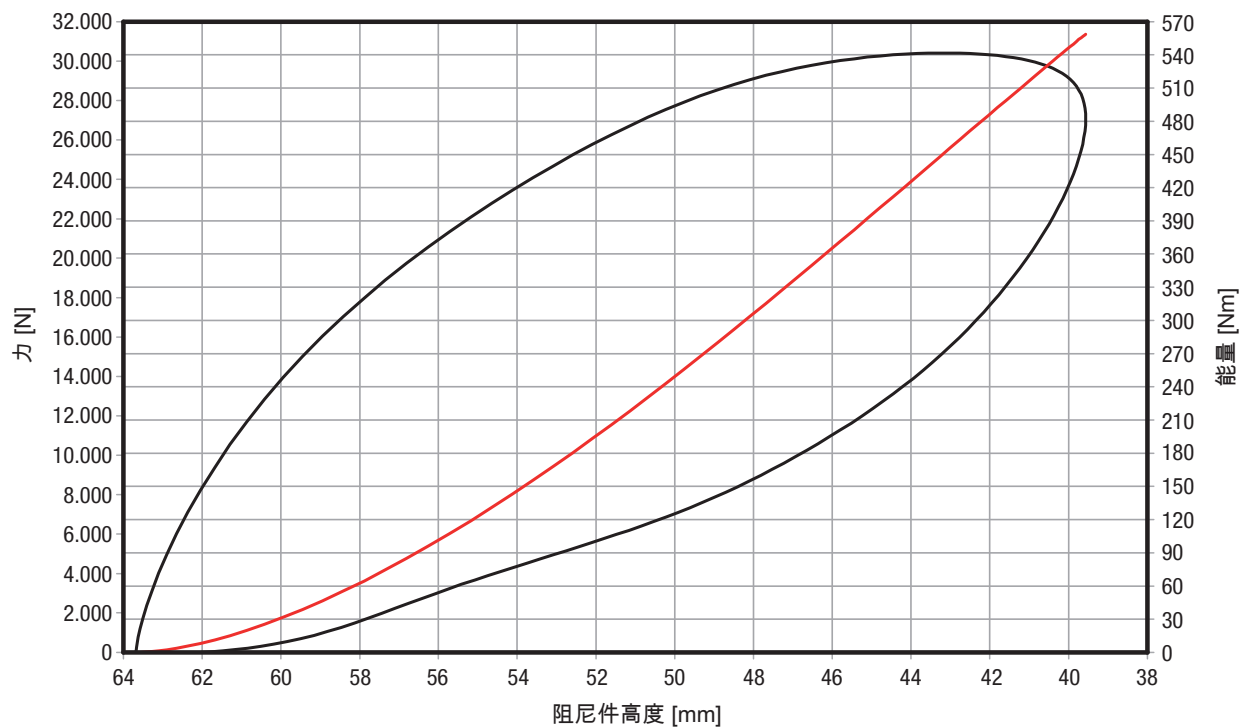

### 26180-08032

急停插件，动态

能量总计值: 831 Nm, 能量绝对值: 550 Nm, 效率: 66 %

