


型材阻尼件技术资料

急停的特征曲线

26182-01407

急停插件，动态


能量总计值: 3,15 Nm, 能量绝对值: 2 Nm, 效率: 64 %

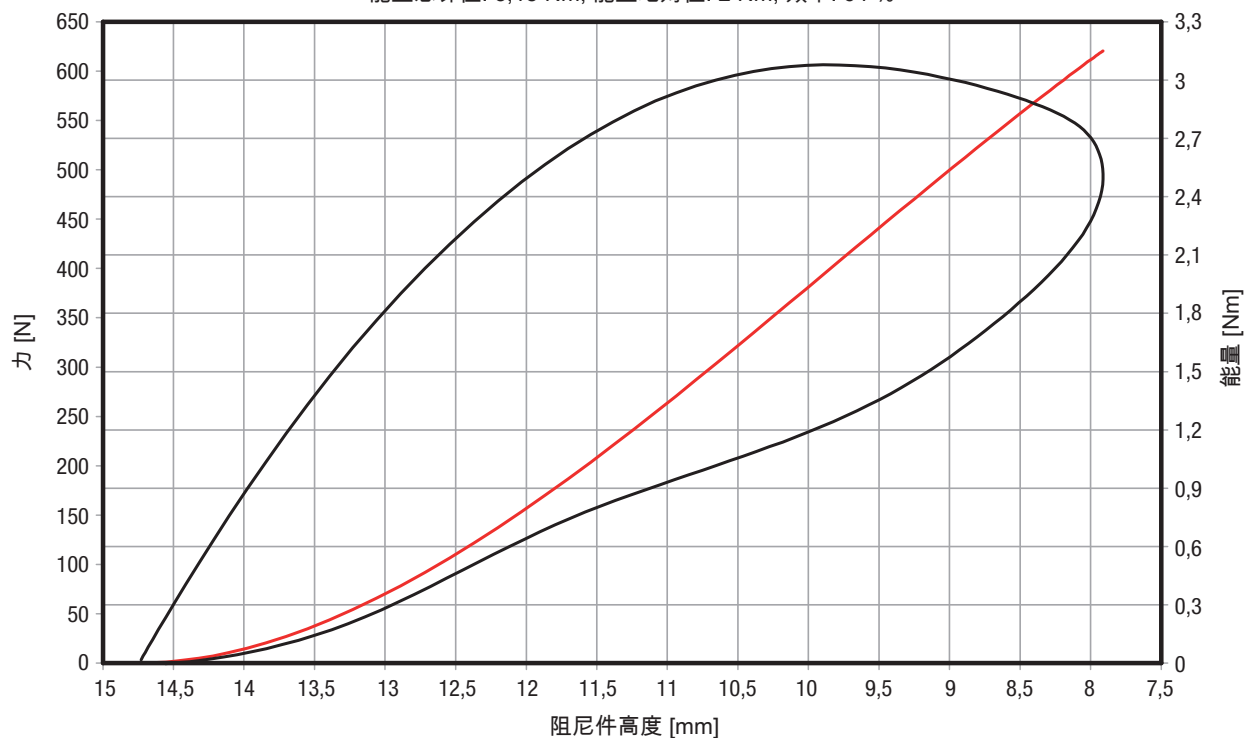

26182-01809

急停插件，动态


能量总计值: 6,16 Nm, 能量绝对值: 3,65 Nm, 效率: 59 %

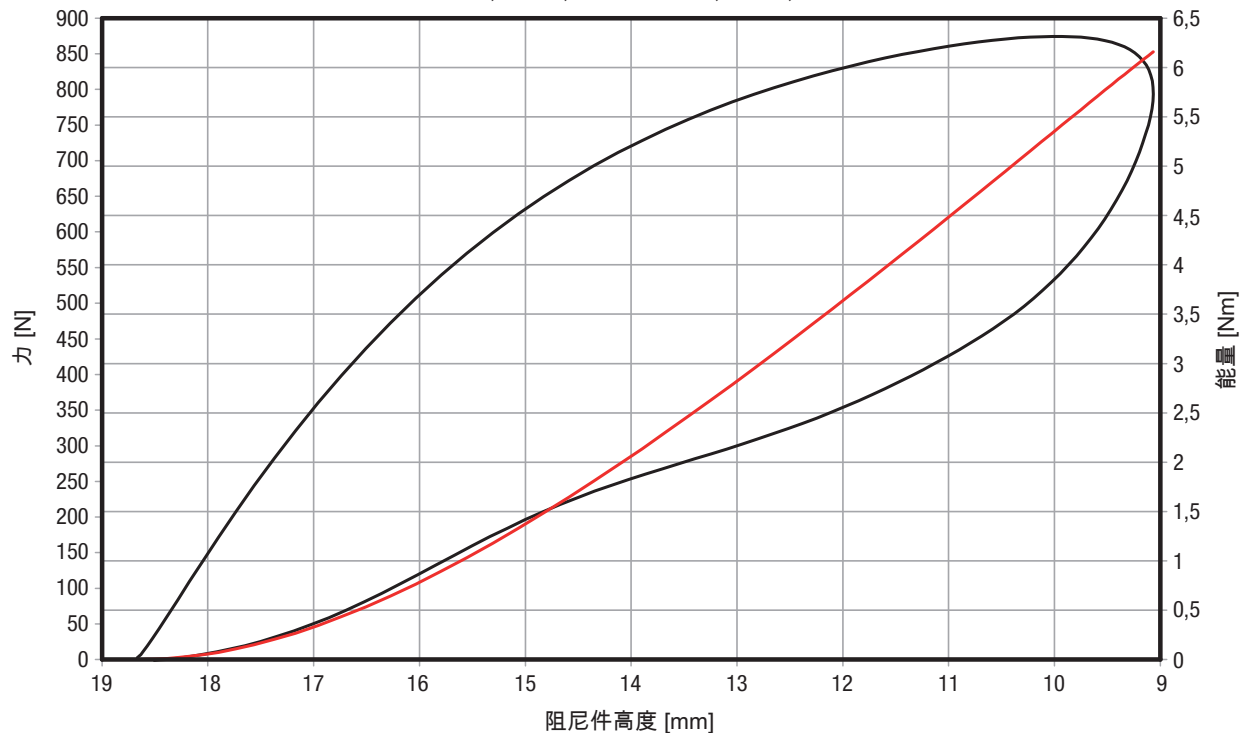

26182-02010

急停插件，动态


能量总计值: 7,1 Nm, 能量绝对值: 3,4 Nm, 效率: 48 %

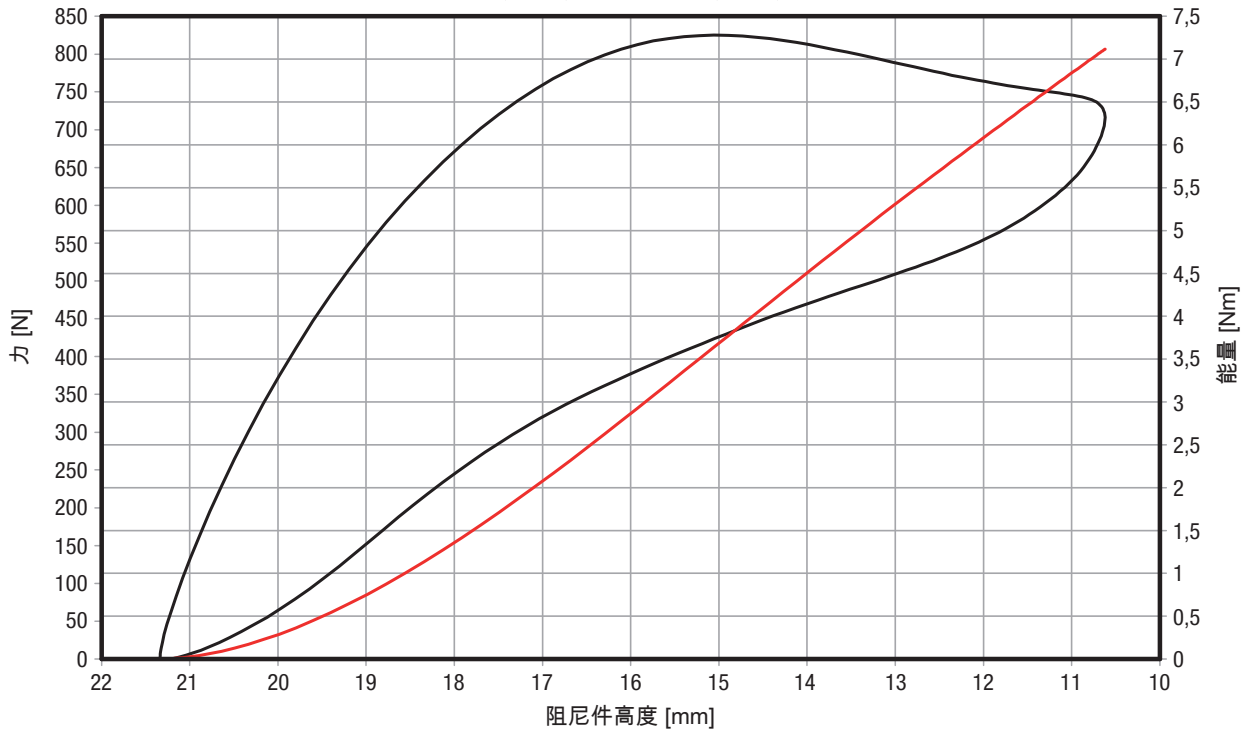

26182-02615

急停插件，动态


能量总计值: 14,5 Nm, 能量绝对值: 6,8 Nm, 效率: 47 %

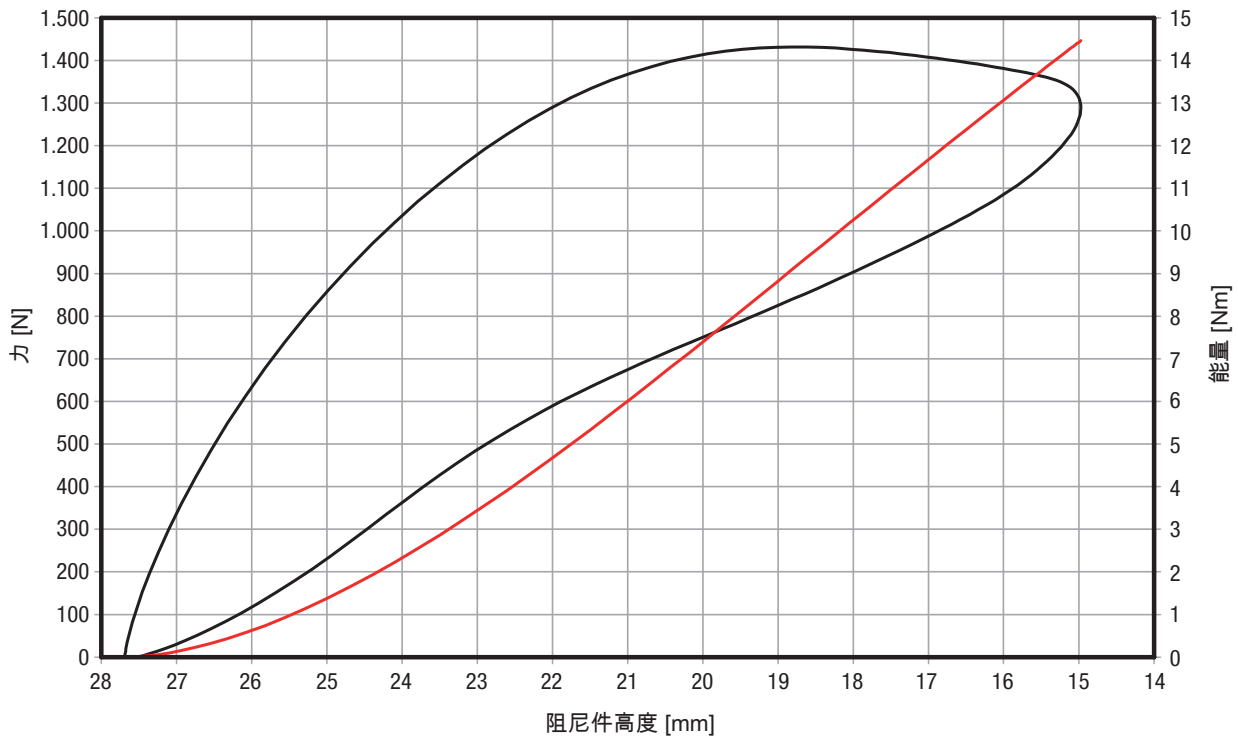

26182-03216

急停插件，动态


能量总计值: 25,8 Nm, 能量绝对值: 12,4 Nm, 效率: 48 %

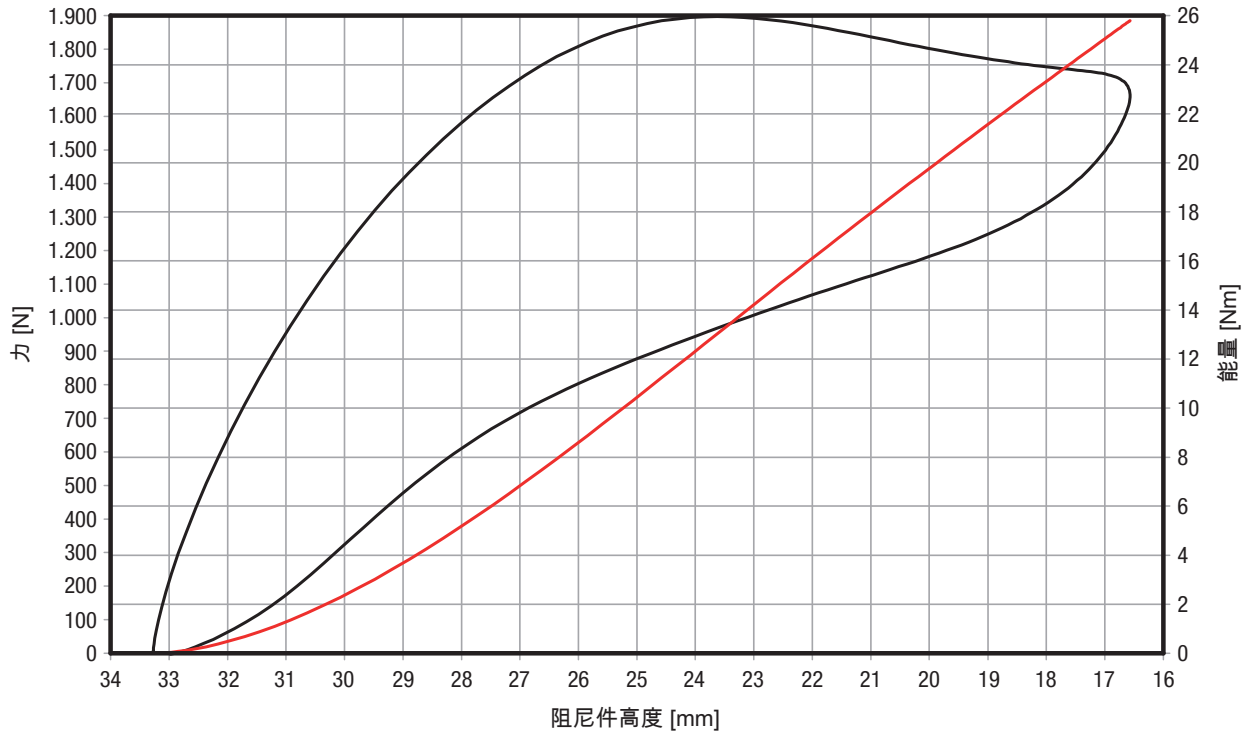

26182-03519

急停插件，动态


能量总计值: 36,2 Nm, 能量绝对值: 19 Nm, 效率: 53 %

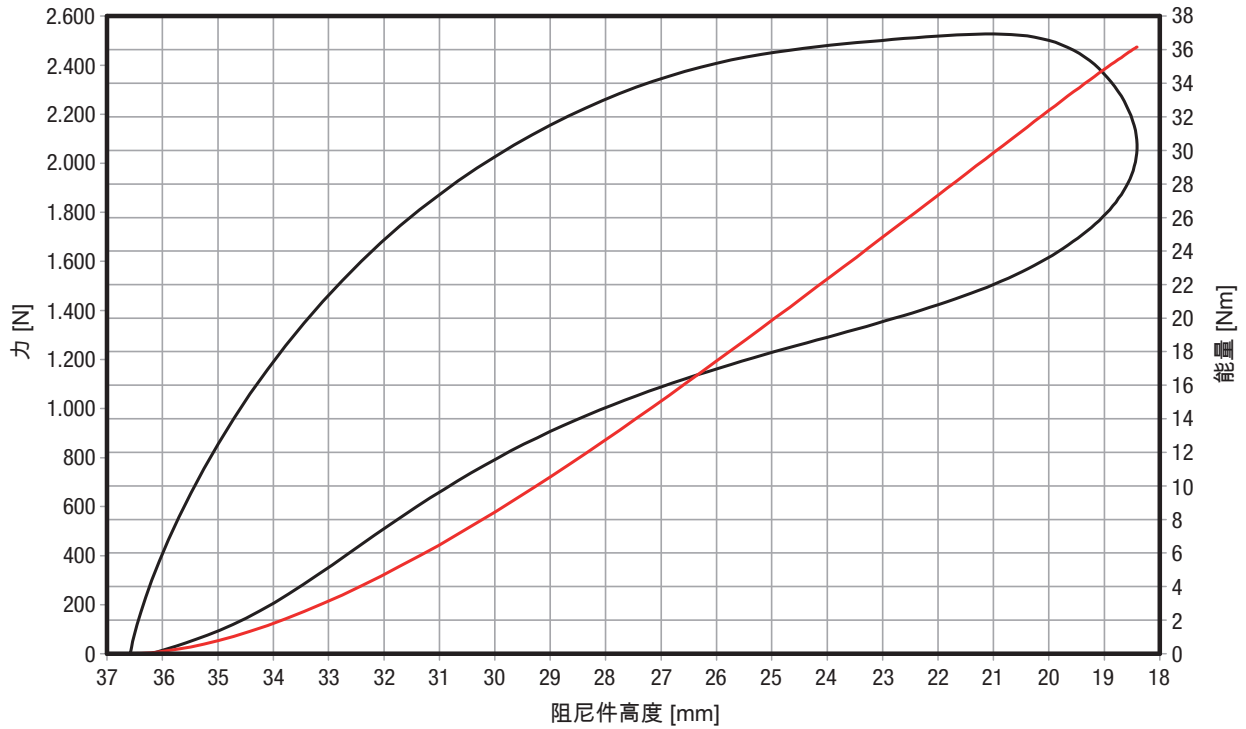

26182-04019

急停插件，动态


能量总计值: 41,5 Nm, 能量绝对值: 22,4 Nm, 效率: 54 %

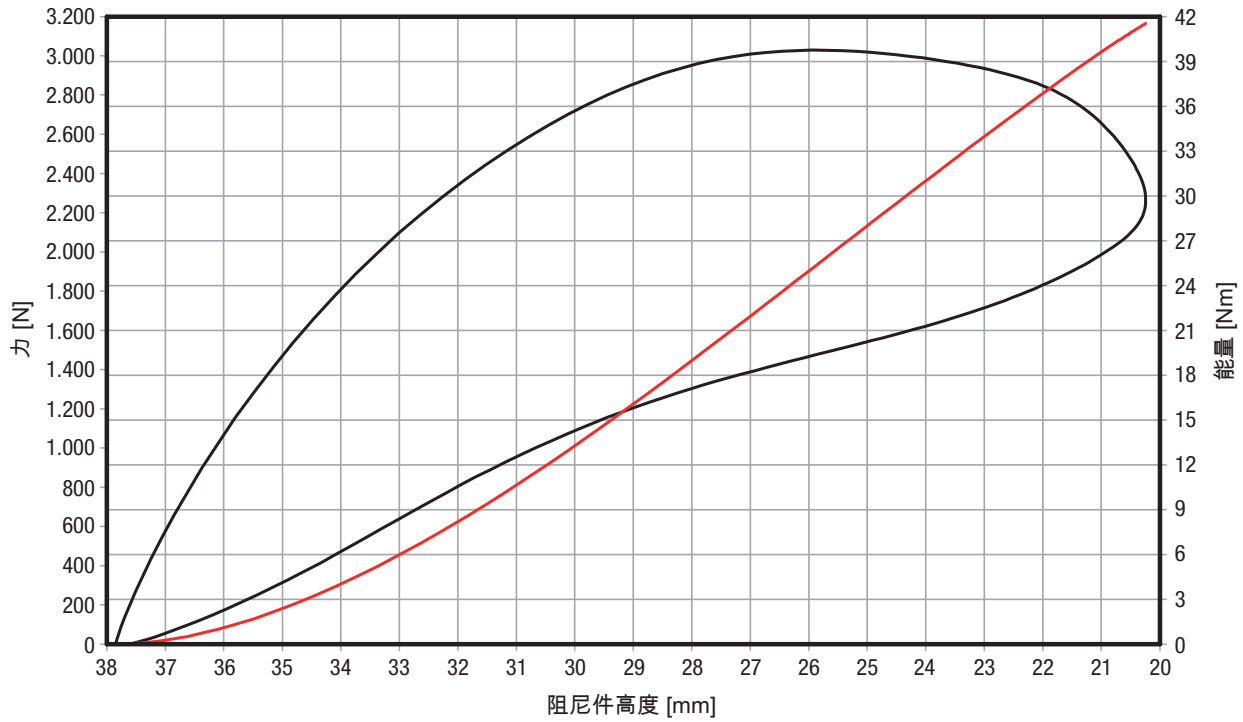

26182-04121

急停插件，动态


能量总计值: 63,3 Nm, 能量绝对值: 32,3 Nm, 效率: 51 %

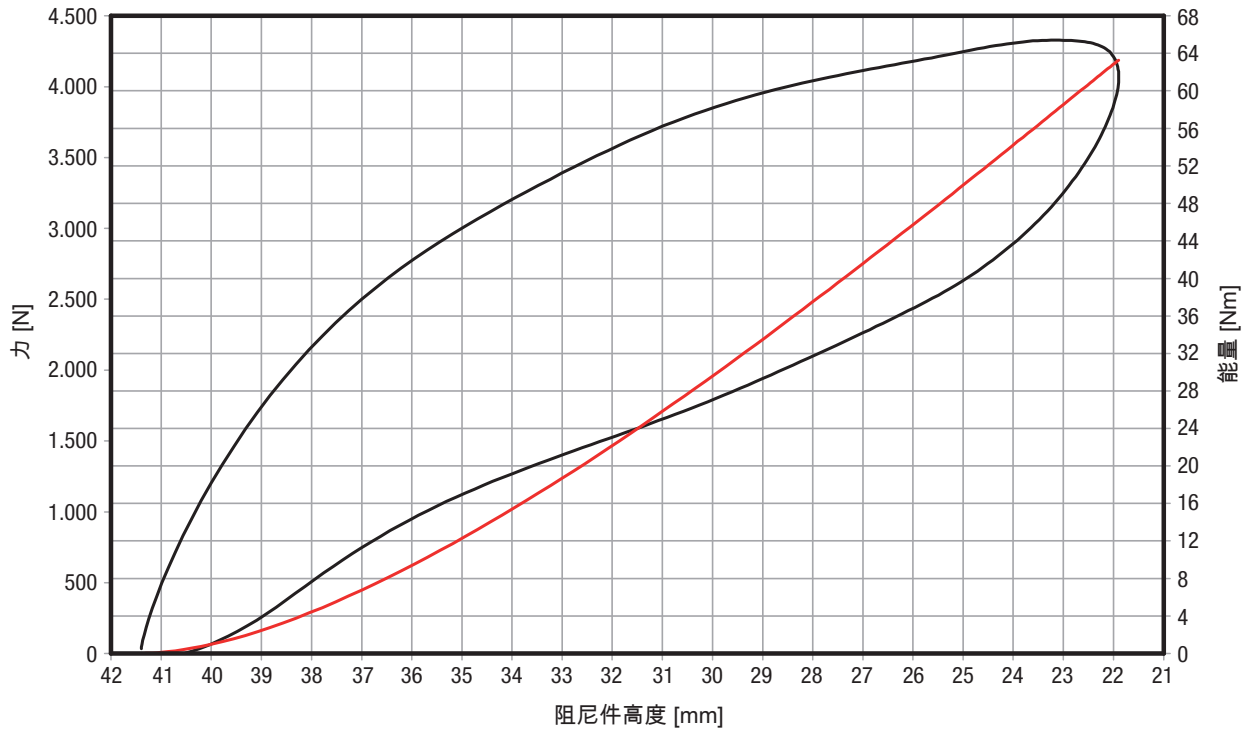

26182-04423

急停插件，动态


能量总计值: 71,8 Nm, 能量绝对值: 39,6 Nm, 效率: 55 %

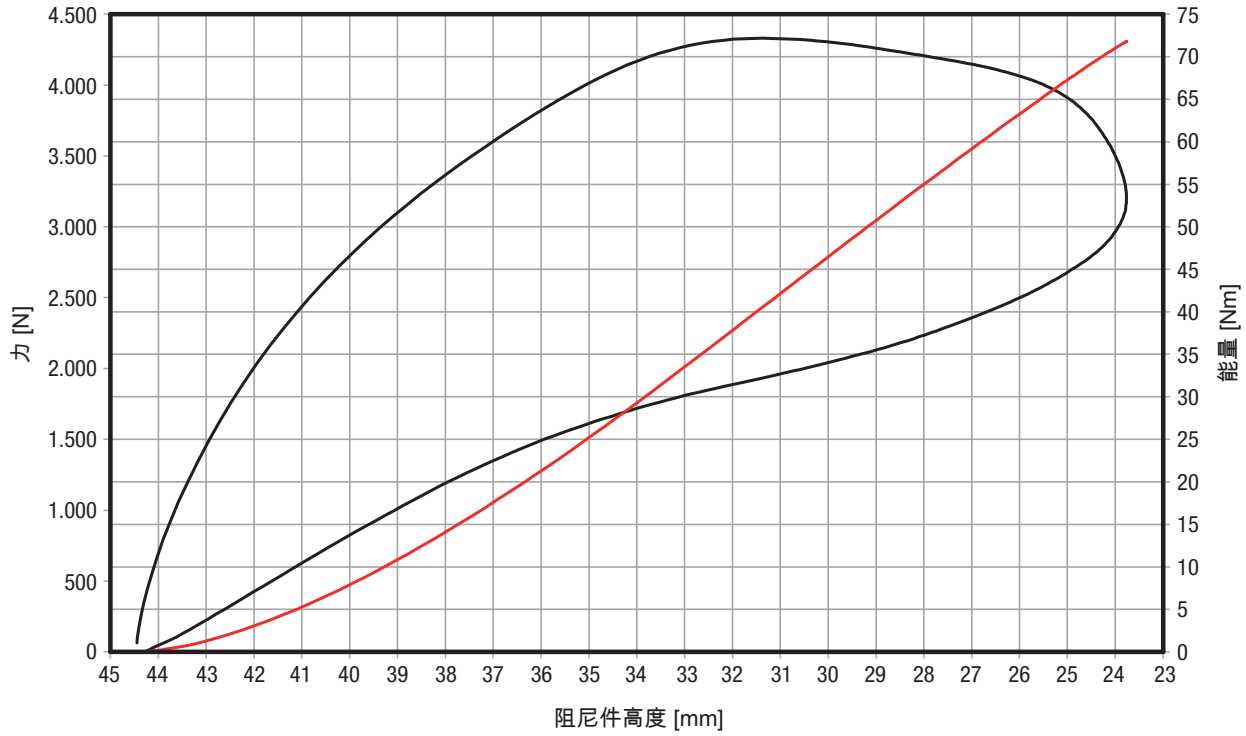

26182-04825

急停插件，动态


能量总计值: 91,1 Nm, 能量绝对值: 46,1 Nm, 效率: 51 %

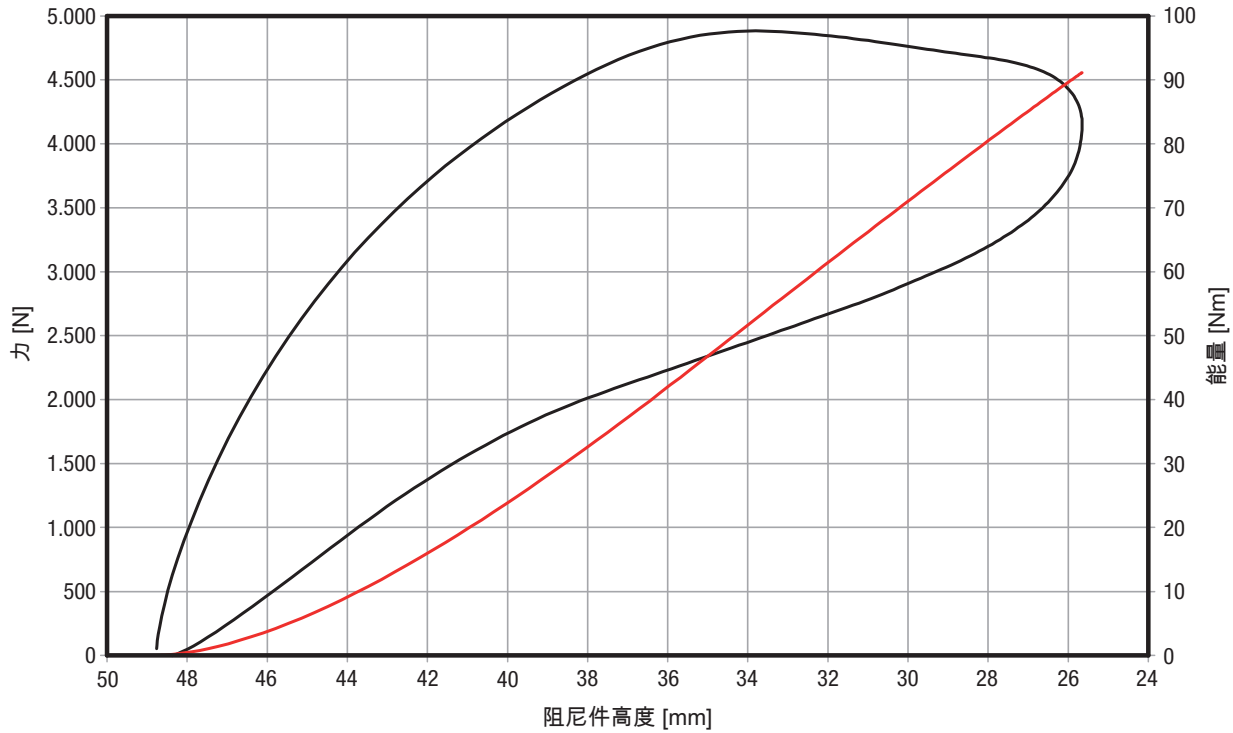

26182-05127

急停插件，动态


能量总计值: 114 Nm, 能量绝对值: 51,6 Nm, 效率: 45 %

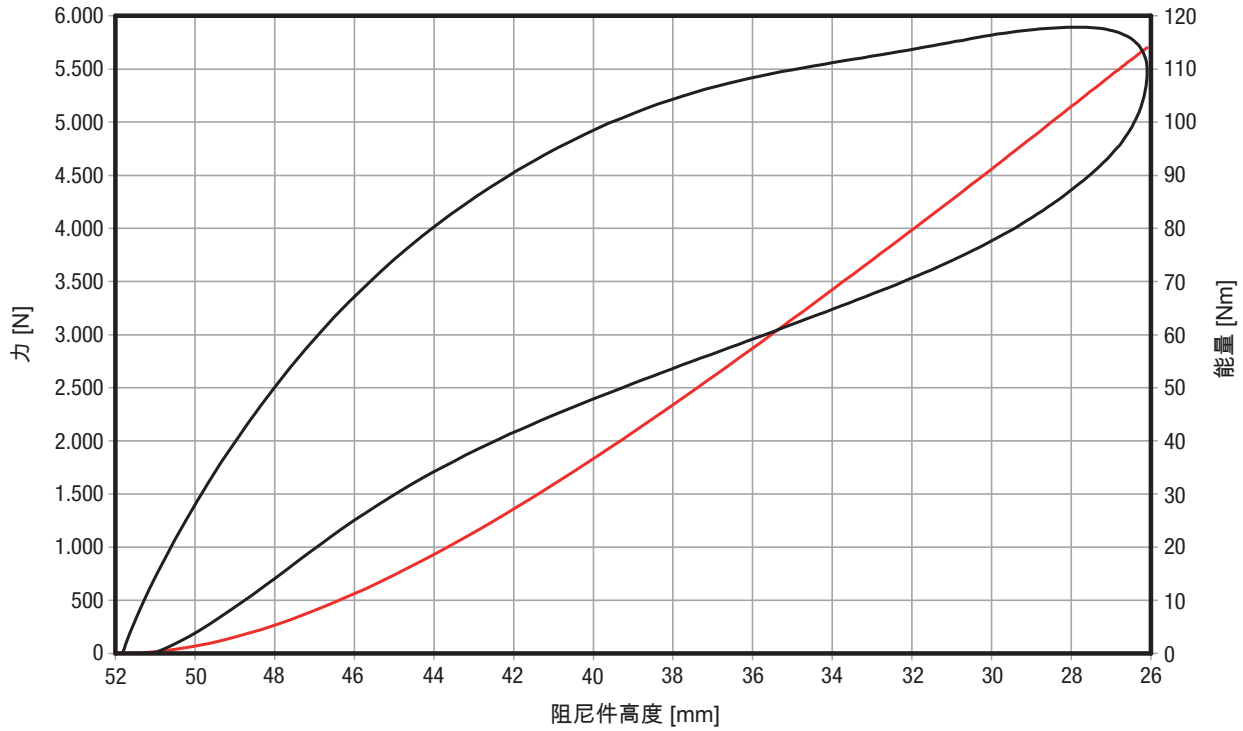

26182-05429

急停插件，动态


能量总计值: 158 Nm, 能量绝对值: 81,8 Nm, 效率: 52 %

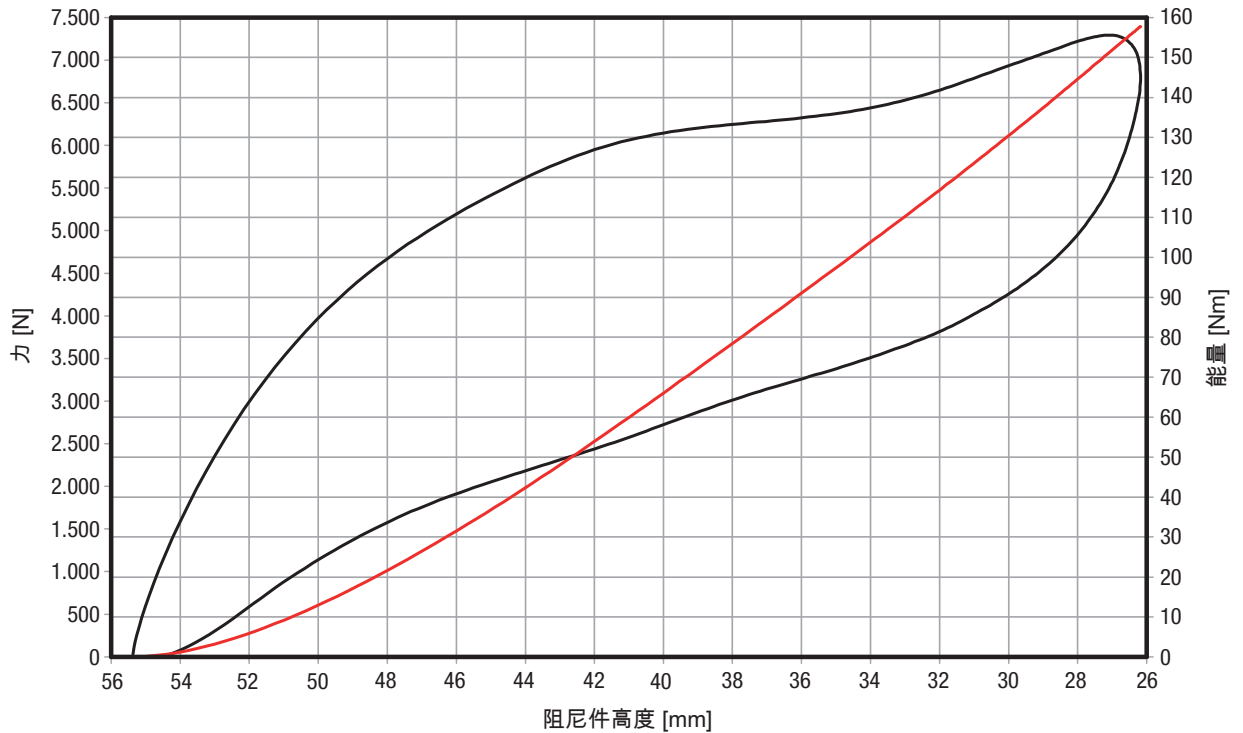

26180-05830

急停插件，动态


能量总计值: 154 Nm, 能量绝对值: 55 Nm, 效率: 36 %

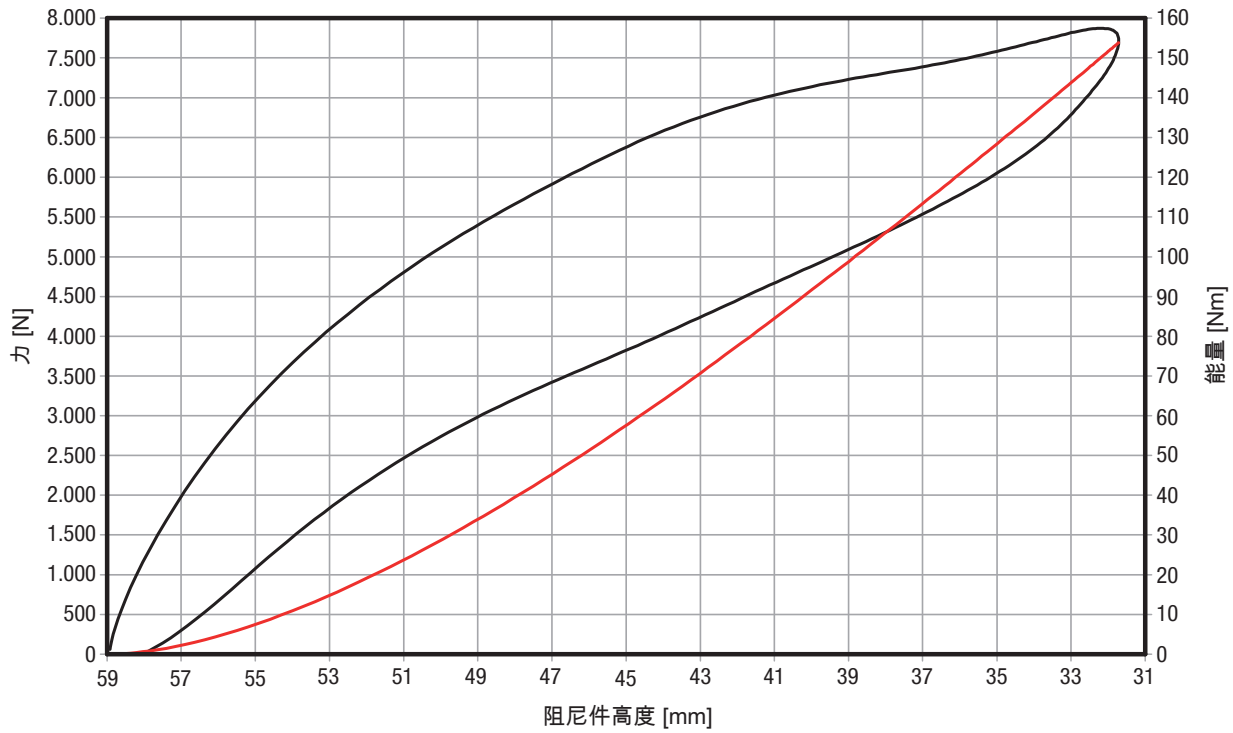

26180-06132

急停插件，动态

能量总计值: 169 Nm, 能量绝对值: 64 Nm, 效率: 38 %

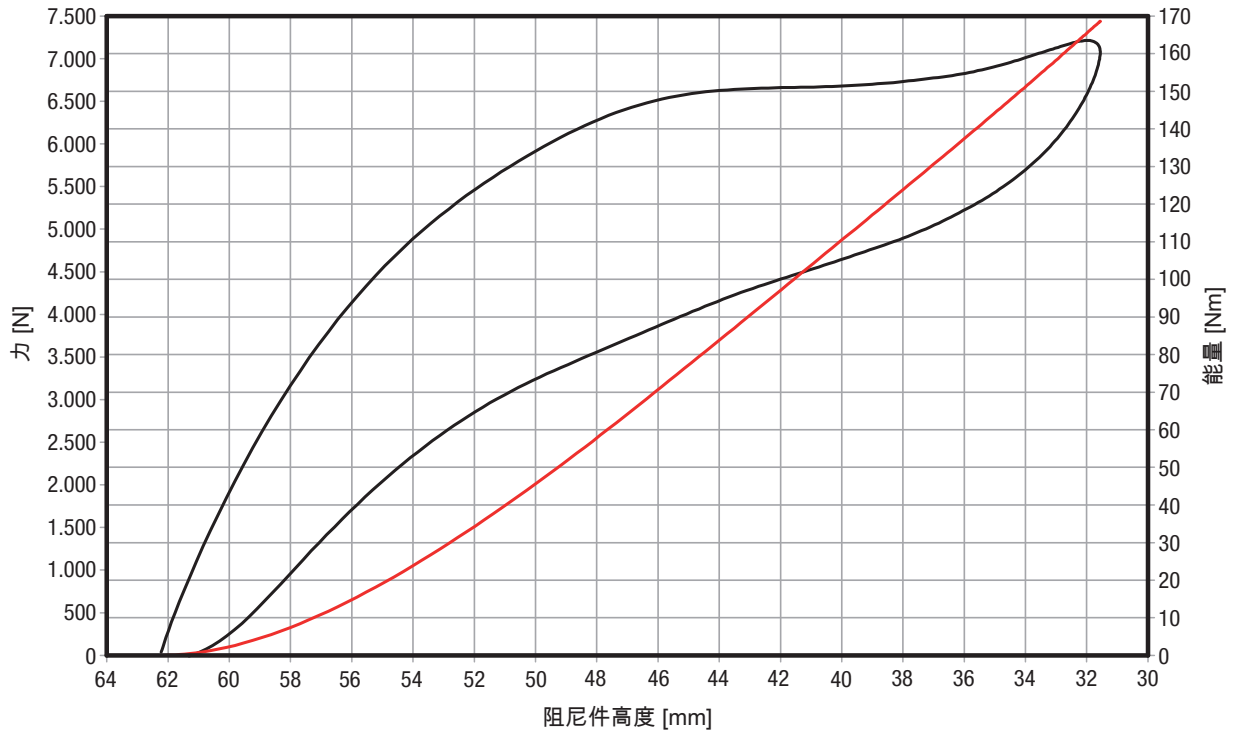

26180-06434

急停插件，动态

能量总计值: 254 Nm, 能量绝对值: 122 Nm, 效率: 48 %

