

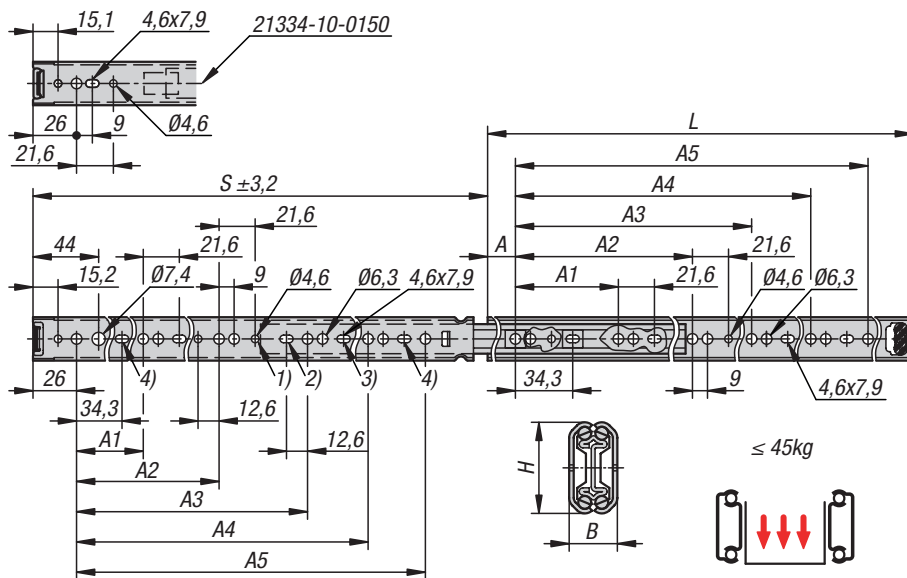


kg 45kg

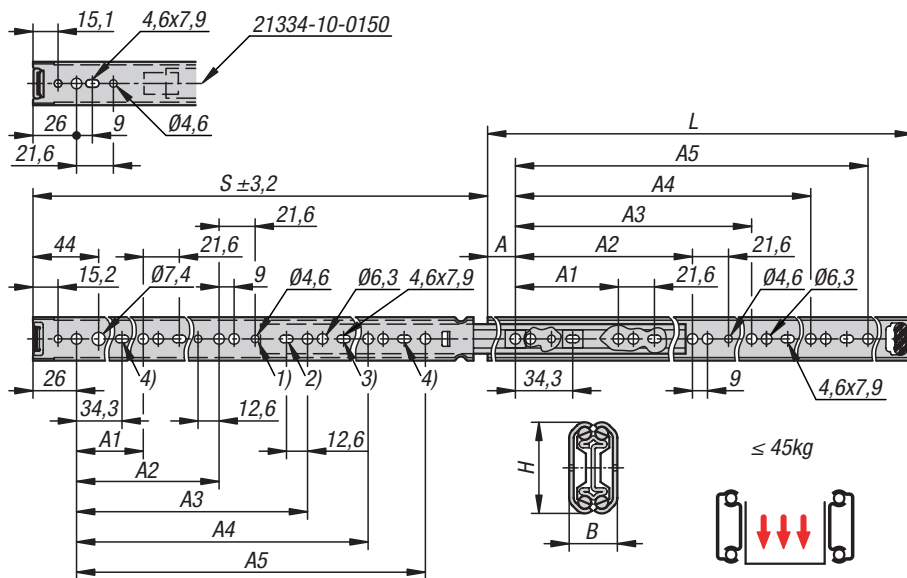

Bestellnummer	Montage	Produkttyp	Tragkraft pro Paar kg	Verpackungsart
21334-10-0150	Montage seitlich	Standard	12	1 Stück = 1 Paar
21334-10-0200	Montage seitlich	Standard	16	1 Stück = 1 Paar
21334-10-0250	Montage seitlich	Standard	25	1 Stück = 1 Paar
21334-10-0300	Montage seitlich	Standard	32	1 Stück = 1 Paar
21334-10-0350	Montage seitlich	Standard	35	1 Stück = 1 Paar
21334-10-0400	Montage seitlich	Standard	45	1 Stück = 1 Paar
21334-10-0450	Montage seitlich	Standard	45	1 Stück = 1 Paar
21334-10-0500	Montage seitlich	Standard	35	1 Stück = 1 Paar
21334-10-0550	Montage seitlich	Standard	30	1 Stück = 1 Paar

Bestellnummer	A	A1	A2	A3	A4	A5	B	H	Hub S	L
21334-10-0150	26	78	-	-	-	-	12,7	26,3	147,5	150
21334-10-0200	26	128	-	-	-	-	12,7	26,3	209	200
21334-10-0250	26	128	-	-	-	-	12,7	26,3	259	250
21334-10-0300	26	128	224	-	-	-	12,7	26,3	308	300
21334-10-0350	26	128	224	-	-	-	12,7	26,3	357	350
21334-10-0400	26	128	224	320	-	-	12,7	26,3	406	400
21334-10-0450	26	128	224	352	-	-	12,7	26,3	456	450
21334-10-0500	26	128	224	352	416	-	12,7	26,3	505	500
21334-10-0550	26	128	224	352	448	489	12,7	26,3	554	550

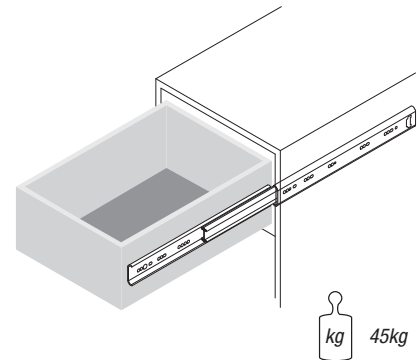

Order No.	Assembly	Product type	Loading per pair kg	Packaging type
21334-10-0150	side mounting	standard	12	1 piece = 1 pair
21334-10-0200	side mounting	standard	16	1 piece = 1 pair
21334-10-0250	side mounting	standard	25	1 piece = 1 pair
21334-10-0300	side mounting	standard	32	1 piece = 1 pair
21334-10-0350	side mounting	standard	35	1 piece = 1 pair
21334-10-0400	side mounting	standard	45	1 piece = 1 pair
21334-10-0450	side mounting	standard	45	1 piece = 1 pair
21334-10-0500	side mounting	standard	35	1 piece = 1 pair
21334-10-0550	side mounting	standard	30	1 piece = 1 pair

Order No.	A	A1	A2	A3	A4	A5	B	H	Travel S	L
21334-10-0150	26	78	-	-	-	-	12,7	26,3	147,5	150
21334-10-0200	26	128	-	-	-	-	12,7	26,3	209	200
21334-10-0250	26	128	-	-	-	-	12,7	26,3	259	250
21334-10-0300	26	128	224	-	-	-	12,7	26,3	308	300
21334-10-0350	26	128	224	-	-	-	12,7	26,3	357	350
21334-10-0400	26	128	224	320	-	-	12,7	26,3	406	400
21334-10-0450	26	128	224	352	-	-	12,7	26,3	456	450
21334-10-0500	26	128	224	352	416	-	12,7	26,3	505	500
21334-10-0550	26	128	224	352	448	489	12,7	26,3	554	550

