

Item description/product images



Description

Material:

Steel.

Version:

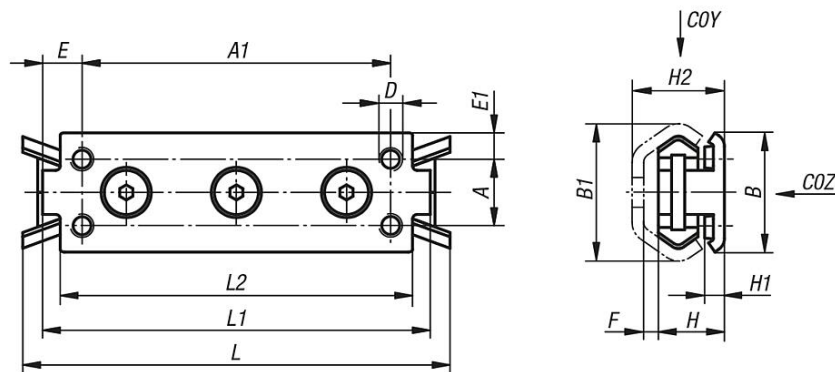
Electro zinc-plated.

Note:

Roller carriage with low coefficient of friction, therefore very free-running. The roller journals are lifetime-lubricated and have a 2Z (dust cover) seal. By simply moving the centre cam roller, the roller carriage can be adjusted to be play-free or under the desired initial tension in the rail. The compact version has a plastic stripper for cleaning the tracks.

Application temperature -30 °C to +120 °C.

Drawings

fixed bearing
compact model

Overview of items

Order No.	Size	A	A1	B	B1	D	E	E1	F	H	H1	H2	L	L1	L2	COY N	COZ N
21320-120080	20	-	60	18	19,2	M5	10	9	3	11,5	5,5	16	90	80	71	300	170
21320-130088	30	15	70	27	29,5	M5	5	6	4	14,1	4,5	20,5	97	88	80	800	400
21320-145150	45	23	120	40	46,4	M6	7,5	8,5	5	22	4	31	160	150	135	1600	860